





HS 2

Quick Guide | Kurzanleitung | Guide de démarrage rapide | Guida rapida | Instrucciones resumidas | Instruções resumidas | Beknopte gebruiksaanwijzing | Krótka instrukcja obsługi | Snabbguide | Kort vejledning | Pikaohje | Γρήγορος οδηγός | Kısa Kılavuz | Краткая инструкция | 快速指南 | 快速使用指南 | クイックガイド | 요약 설명서



In the box

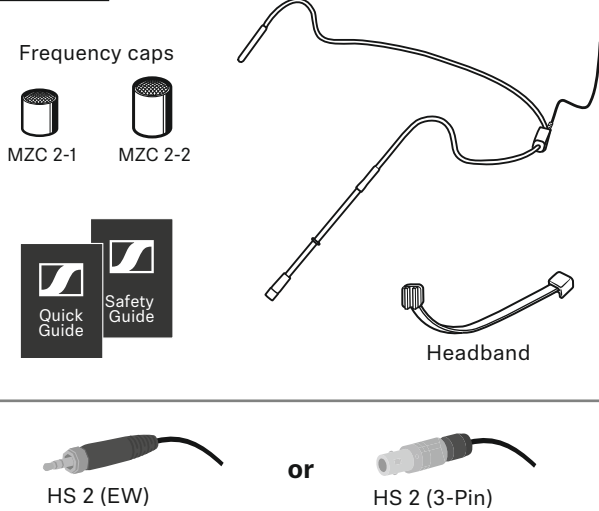


Adjusting

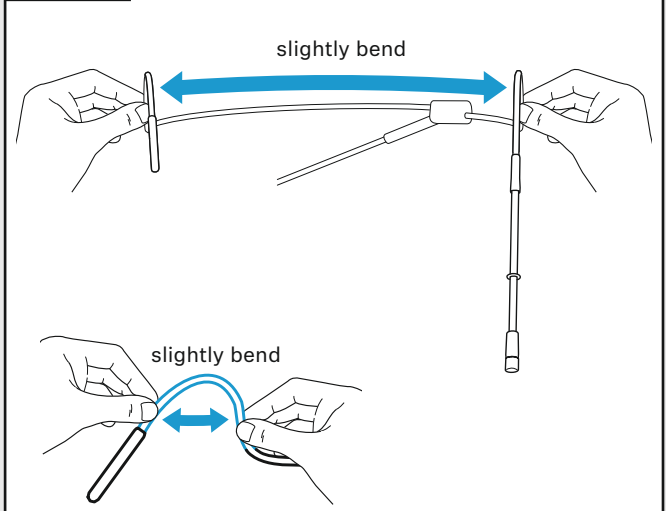


Headband

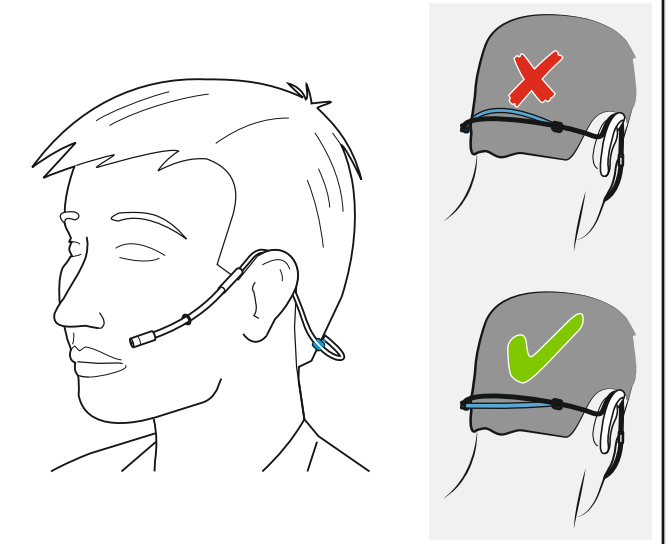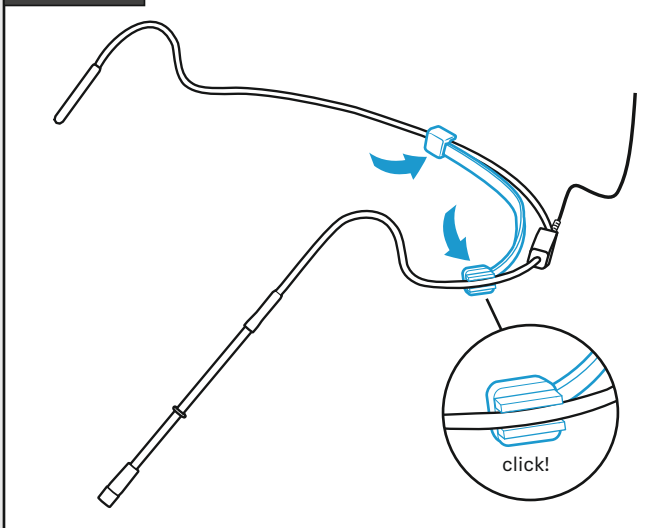

Setup

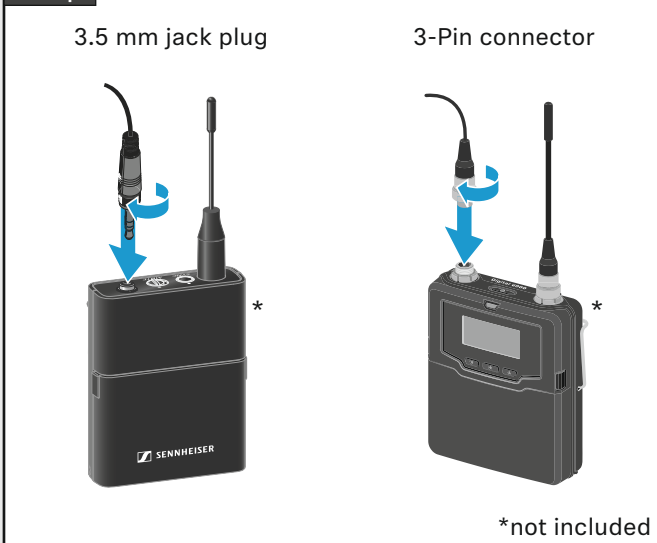

Use

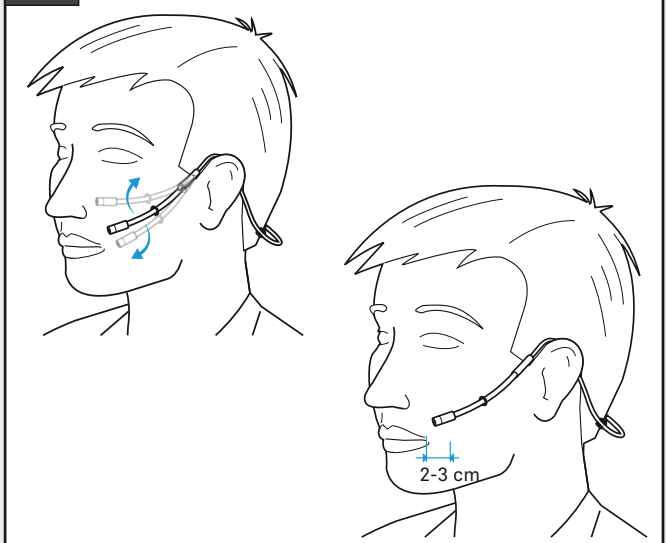

Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany, www.sennheiser.com
Printed in Germany, Publ. 11/25, 587483/A05

SENNHEISER

Accessories

Frequency cap

short cap:
MZC 2-1



+ 2 dB

or

long cap:
MZC 2-2



+ 4 dB




Windshields

MZW 2*



- 20 dB
MZW 2*


MZW 02*



- 30 dB
MZW 2* + MZW 02*

*optional accessories


Cleaning

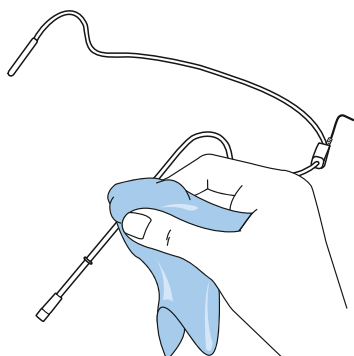

Specifications

Pick-up pattern	omni-directional
Frequency response	20 - 20,000 Hz
Sensitivity in free field	5 mV/Pa $\pm$ 3 dB
Nominal impedance	1 k Ω
Min. terminating impedance	4.7 k Ω
Equivalent noise level:	
A-weighted	28 dB
CCIR-weighted	41 dB
Max. sound pressure level	140 dB
Power supply	7.5 V
Connector	3.5 mm jack 3-Pin
Cable length	1.6 m
Diameter of microphone	4.8 mm
Weight with headband	
3.5 mm	30.1 g
3-Pin	28.9 g

Frequency response

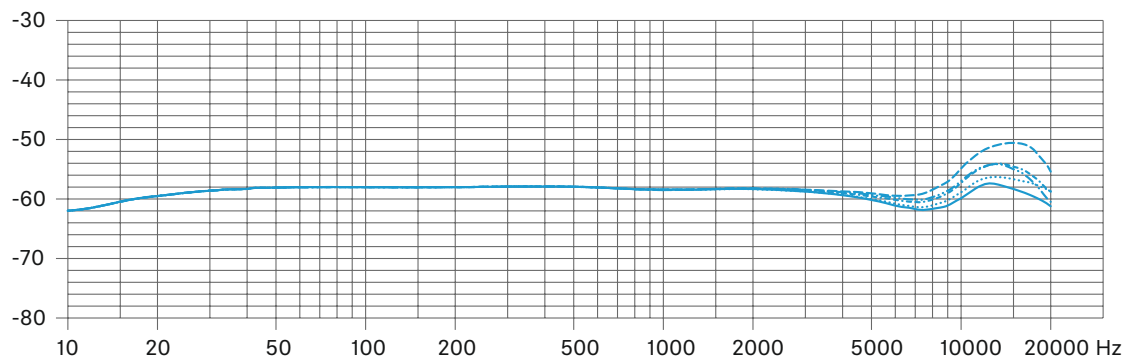

Frequency response curves of the microphone

Microphone placed in the corner of the mouth, distance to the mouth 3 cm

— capsule only

..... with MZC 2-1

----- with MZC 2-2

-.-.-. with MZW 2

-.-.-. with MZW 2 and MZW 02