



MAT 133 | MAT 133-S MAT 153-S

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guida rapida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Γρήγορος οδηγός
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
퀵 가이드

SENNHEISER



www.sennheiser.com/download


Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com


Printed in Germany, Publ. 02/25, 549118/A05

In the box


MAT 133



MAT 133-S




MAT 153-S



LED status

MAT 133-S
MAT 153-S

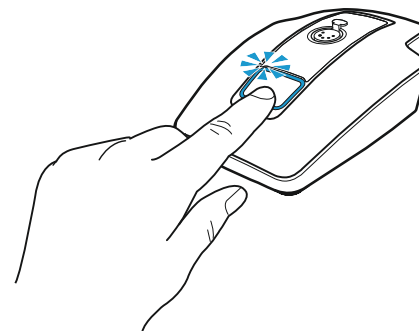


lights up green:
microphone active

lights up red*:
microphone muted

*This function is not supported by all PAs/DSPs.



Mounting

Sennheiser goosenecks*:
MZH 30xx | MEG 14-40(-L)


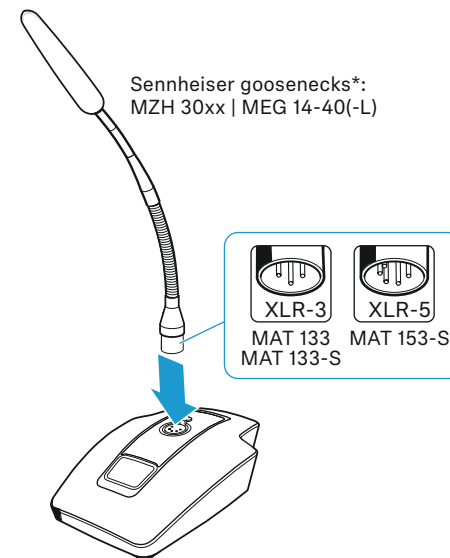


*not included



Setup

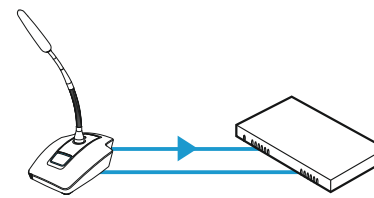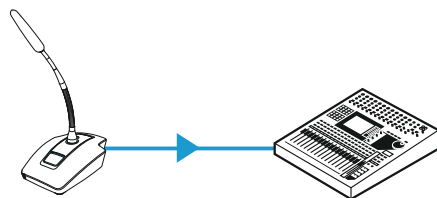

MAT 133-S
MAT 153-S

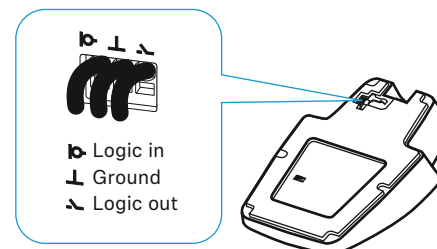
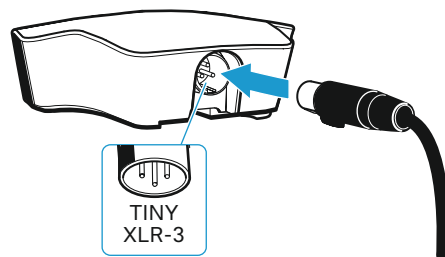


see Instruction manual of the microphone series**



Microphone behavior

MEB 114-S

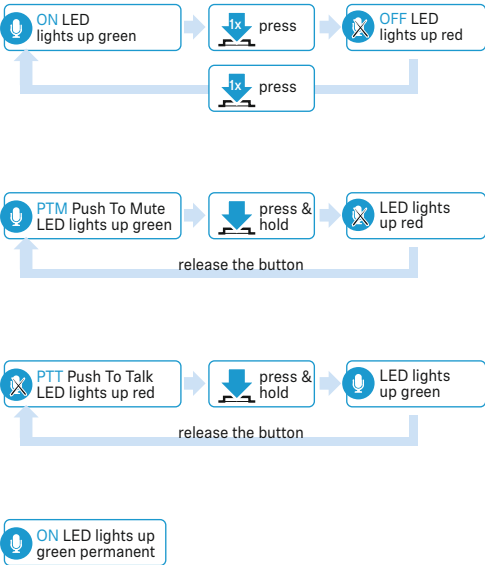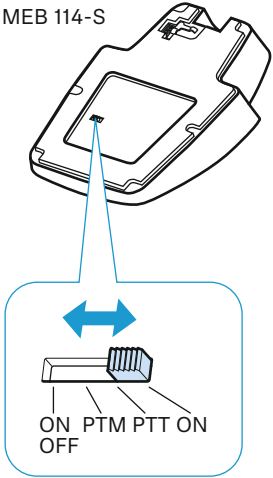

Specifications

	MAT 133	MAT 133-S	MAT 153-S
Current consumption	1.9 mA	3.7 mA	
Power supply	48 V phantom power (P48)		
Logic output	high level output voltage > 2.4 V low level output voltage < 0.4 V		
Connector	MIC IN: XLR-3F MIC OUT: XLR-3M 3x terminal		MIC IN: XLR-5F MIC OUT: XLR-3M 3x terminal
Temperature	operation: −10 °C – +50 °C storage: −25 °C – +70 °C		
Dimensions	120 x 43 x 170 mm		
Weight	approx. 1210 g		