



HM 200

Headset microphone

Sennheiser electronic SE & Co. KG


Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 01/25, 587496/A02


SENNHEISER

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guida rapida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide
Kort vejledning
Pikaohje
Σύντομες οδηγίες
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
요약 안내서

In the box

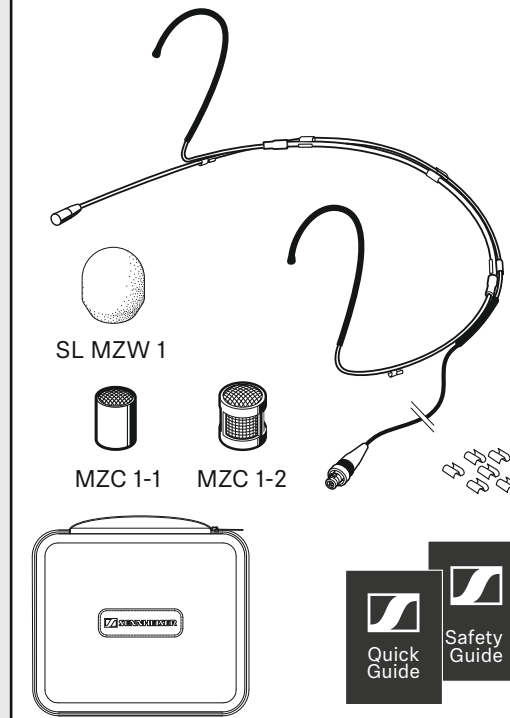

Setup

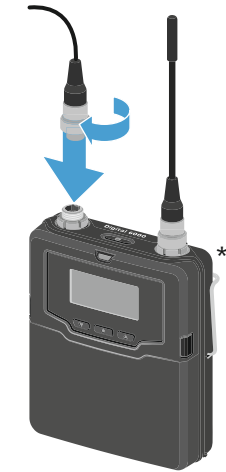

*not included

Setup

Frequency caps

MZC 1-2




+ 4 dB

MZC 1-1



+ 2 dB


SL MZW 1




- 10 dB

Windshield


Setup

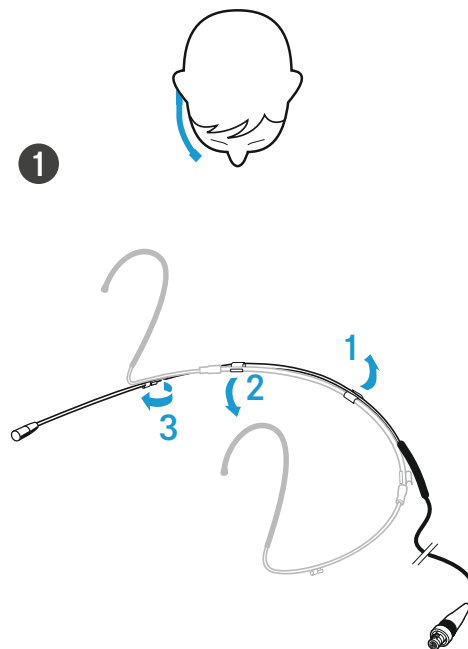


2

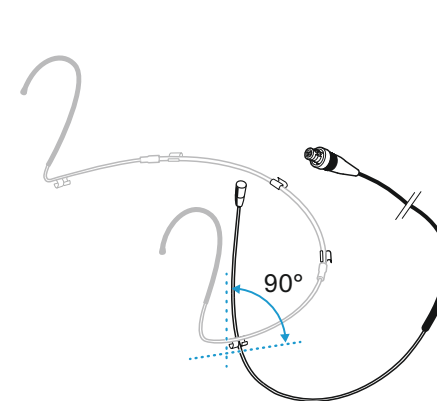

3

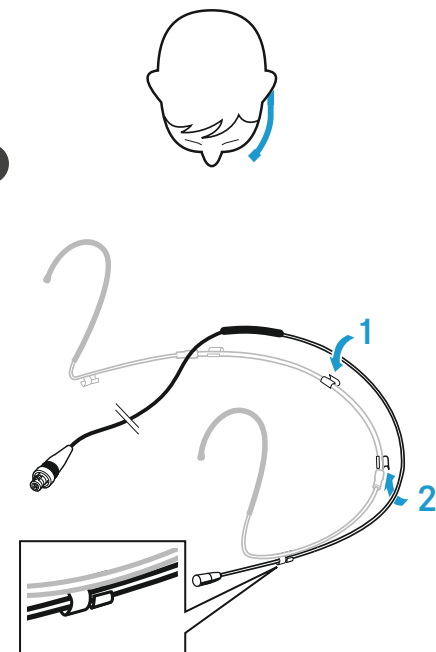


Cleaning

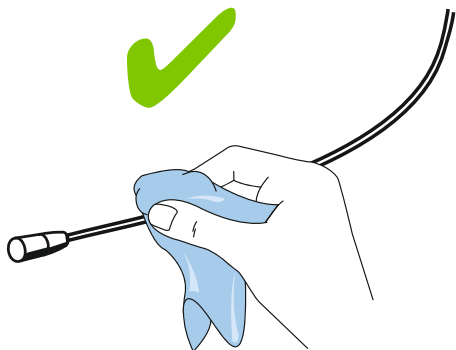

Specifications

Frequency response	20 – 20,000 Hz ± 3 dB
Pick-up pattern	omni-directional
Nominal impedance	1 k Ω
Min. terminating impedance	4.7 k Ω
Sensitivity	5 mV/Pa ± 3 dB
Diameter of mic capsule	3.3 mm
Max. sound pressure level	143 dB
Equivalent noise level	27 dB(A)
Supply current	approx. 240 μ A
Power supply	4.5 – 15 V
Operating temperature	-10 °C to +50 °C
Storage temperature	-20 °C to +70 °C
Relative humidity	max. 95 %
Cable length	1.6 m
Diameter of boom arm	1.1 mm
Weight	approx. 13 g
Connector	3-Pin connector

Polar pattern

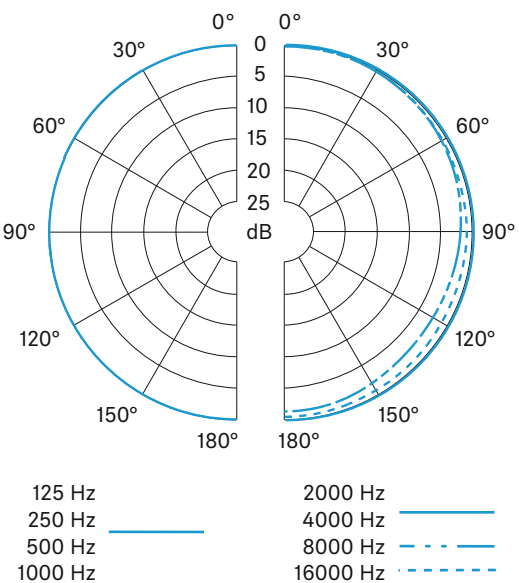

Frequency response

