






MKE Essential

Quick Guide | Kurzanleitung | Guide rapide | Guida rapida | Guía de inicio rápido | Guia rápido | Beknopte handleiding | Krótka instrukcja obsługi | Snabbguide | Kort vejledning | Pikaohje | Γρήγορος οδηγός | Kısa Kılavuz | Краткая инструкция | 快速指南 | 快速使用指南 | クイックガイド | 요약 설명서

In the box



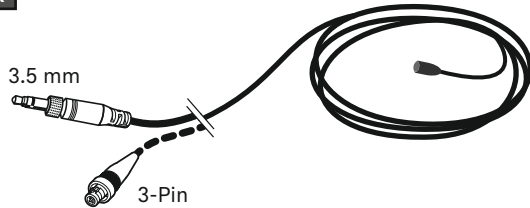


Foam windscreen
SL MZW 1




MZQ 02

Frequency response

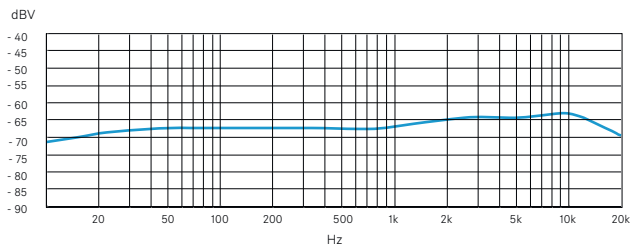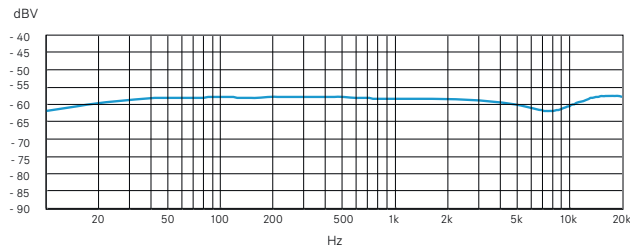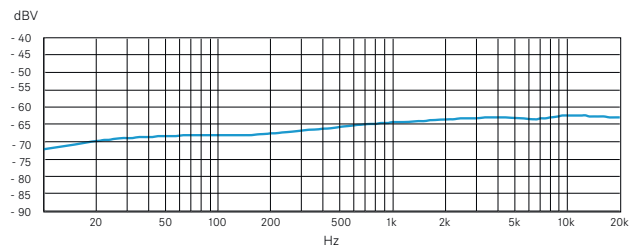

Technical Data




Pick-up pattern	omni-directional
Frequency response	20 - 20,000 Hz
Sensitivity in free field, no load (1 kHz)	5 mV, Pa $\pm$ 3.5 dB
Nominal impedance	1 k Ω
Min. terminating impedance	4.7 k Ω
Equivalent noise level:	
- A-weighted	28 dB
- CCIR-weighted	41 dB
Max. sound pressure level	140 dB
Plug	3.5 mm or 3-Pin
Cable length	1.6 m
Diameter of mic capsule	4.8 mm
Weight	16 g



Sennheiser electronic SE & Co. KG

SENNHEISER


Am Labor 1, 30900 Wedemark, Germany, www.sennheiser.com
Printed in Germany, Publ. 10/25, 578672/A03

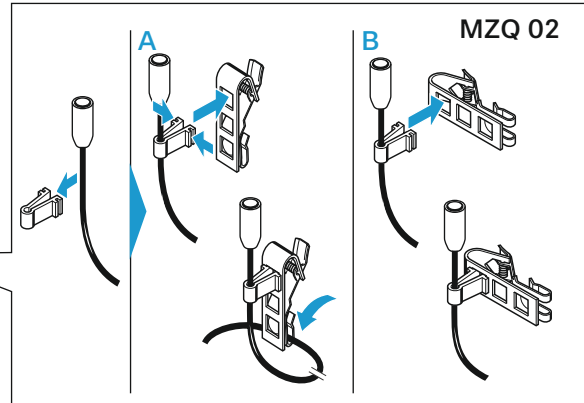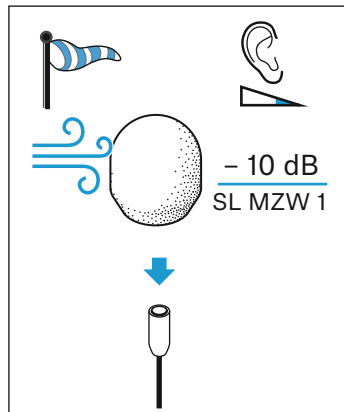


Clip

Wind screen






Instrument

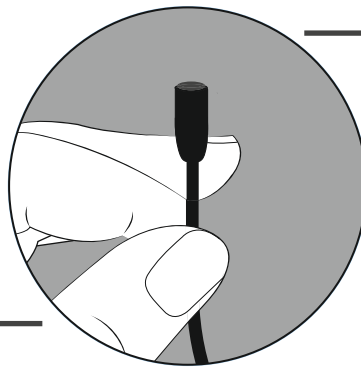

Magnetic mount



Pin mount

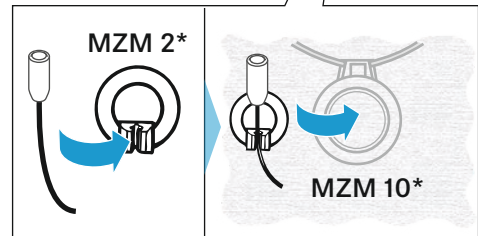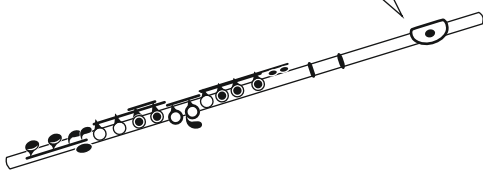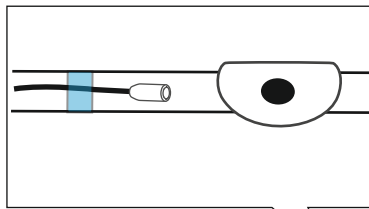

MZS 2*

* Accessory | Zubehör | Accessoires | Accesorios | Accesorios | Acessórios | Toebehoren | Części akcesoria | Tillbehör | Tilbehør | Lisäosia | Αξεσουάρ ανταλλακτικά | Aksesuar | Аксессуары | 附件 | 付属品 | 액세서리부품