




MKH 50-P48

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guida rapida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Γρήγορος οδηγός
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
퀵 가이드

SENNHEISER

In the box

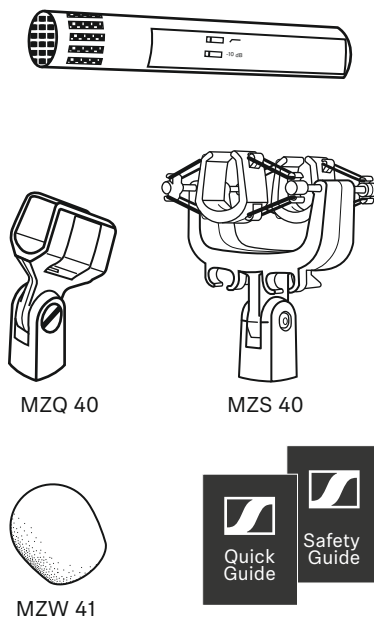


MZQ 40

MZS 40

MZW 41




Overview

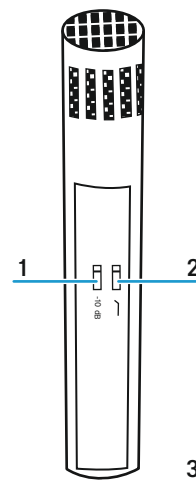


- 1 switch for preattenuation
- 2 switch for roll-off-filter
- 3 XLR-3 connector


Adjusting

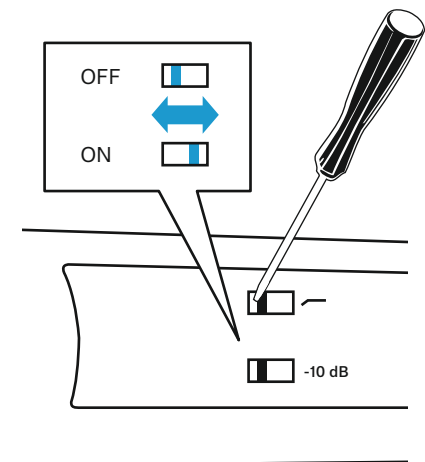

Setup

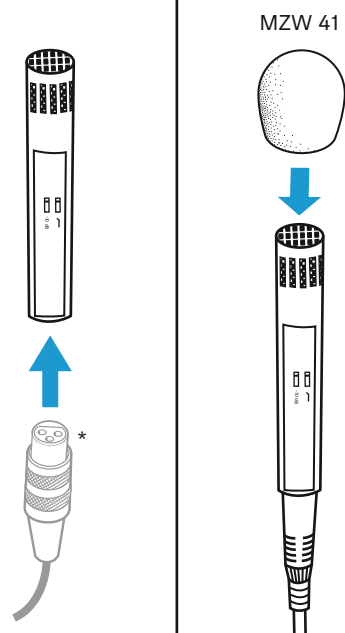


MZW 41

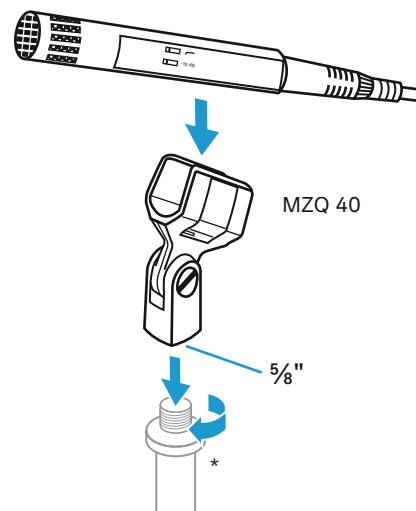

MZQ 40

5/8"

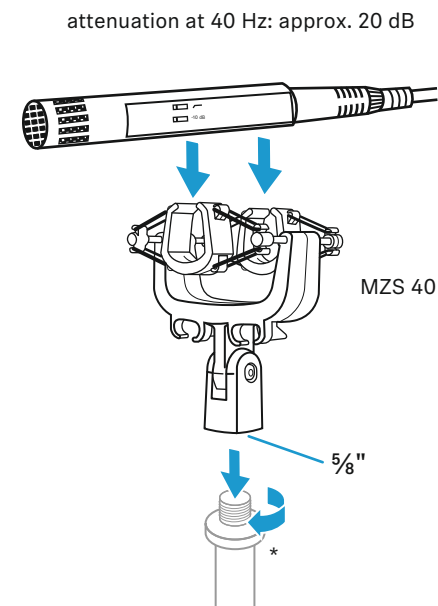

MZS 40

5/8"

attenuation at 40 Hz: approx. 20 dB


Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com



Printed in Germany, Publ. 07/25, 583989/A03

* not included

Power supply and connections

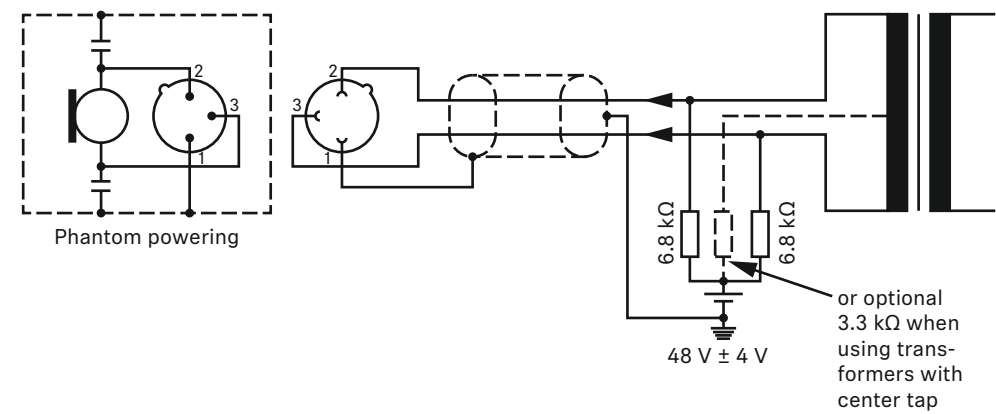


Cleaning




Accessories


MZS 20-1*



MZS 20-1*



MZH 20-1*

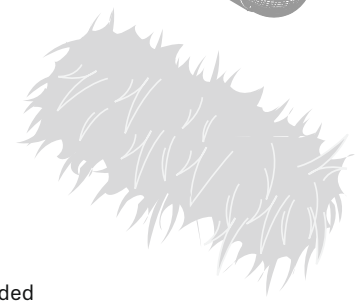



* not included

Specifications

Pick-up pattern	super-cardioid
Frequency response	40 – 20,000 Hz
Sensitivity (free field, no load, 1 kHz)	25 (8) mV/Pa ±1 dB
Max. SPL	134 (142) dB / 1 kHz
Equivalent noise level	
A-weighted	12 (18) dB(A)
CCIR-weighted	21 (27) dB
Nominal impedance	150 Ω
Min. terminating impedance	1 kΩ
Phantom powering	48 V ± 4 V
Current consumption	2 mA
Dimension	∅ 25 x 153 mm
Weight	approx. 100 g

Values in () with attenuator switched on (–10 dB)

Polar pattern and frequency response

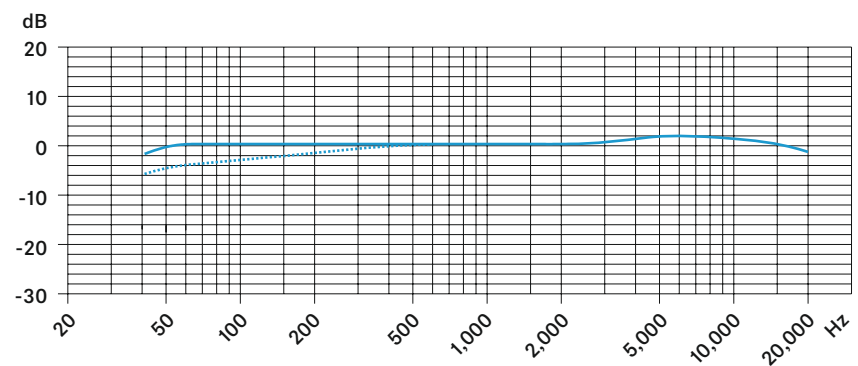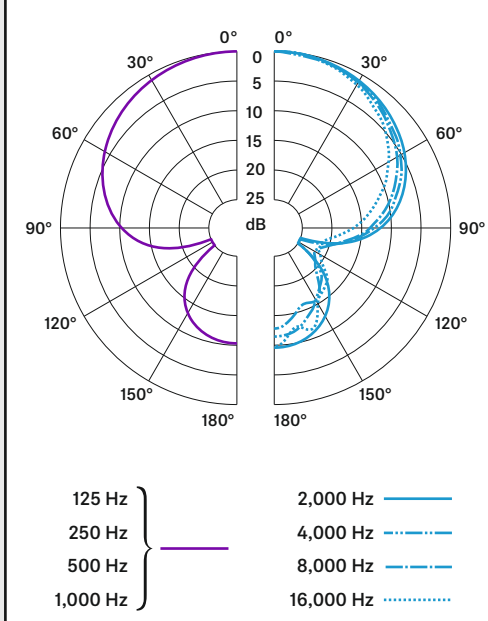

Effect of switchable roll-off filter

