



www.sennheiser.com/documentation



www.sennheiser.com/download



ME 9002 | ME 9004 ME 9005

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guida rapida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Γρήγορος οδηγός
Kısa Kılavuz
Краткая инструкция
快速指南
クイックガイド
퀵 가이드

SENNHEISER

Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany
Publ. 10/25, 583973/A03

In the box



ME 9002

or





ME 9004

or



ME 9005






5 x Pop shield


Setup



Cleaning

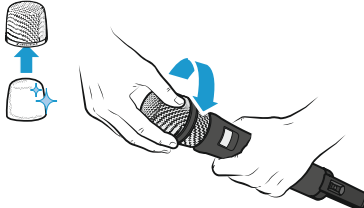


Accessories

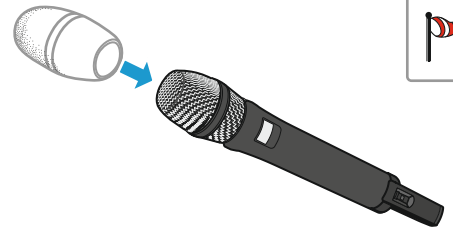


MZW 1*





*not included




- 20 dB




ME 9002

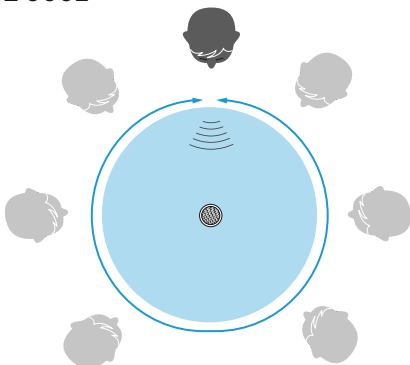

ME 9004

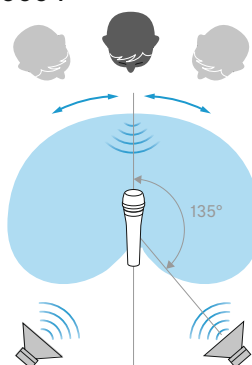

ME 9005

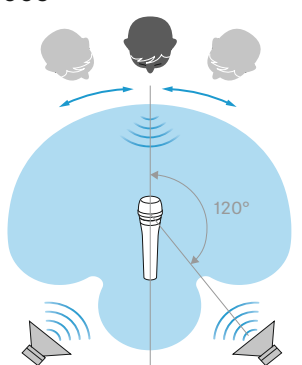



Specifications

	ME 9002	ME 9004	ME 9005
Transducer principle	pressure transducer, pre-polarized condenser microphone	pressure gradient transducer, pre-polarized condenser microphone	pressure gradient transducer, pre-polarized condenser microphone
Frequency response	20 to 20,000 Hz	40 to 20,000 Hz	40 to 20,000 Hz
Pick-up pattern	omni-directional	cardioid	super-cardioid
Sensitivity (at 1 kHz)	3.35 / 33.5* mV/Pa -49.5 / -29.5* dBV/Pa	1.88 / 18.8* mV/Pa -54.5 / -34.5* dBV/Pa	2.0 / 20* mV/Pa -54 / -34* dBV/Pa
Max. SPL	139/ 131* dB	145/ 136* dB	145/ 135* dB
Equivalent noise level			
A-weighted	32 / 18* dB(A)	31 / 19* dB(A)	31 / 18* dB(A)
CCIR-weighted	45 / 31* dB	44 / 29* dB	43 / 27* dB



*with switched-off attenuation

Polar pattern and frequency response

ME 9002

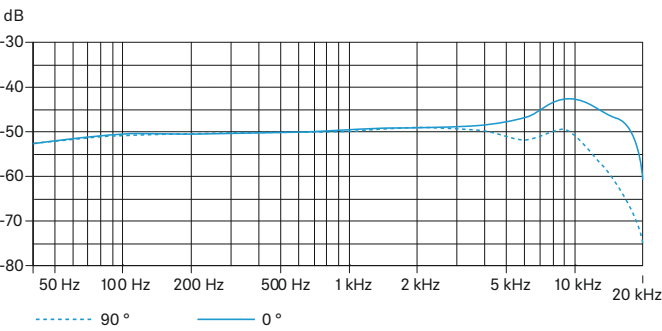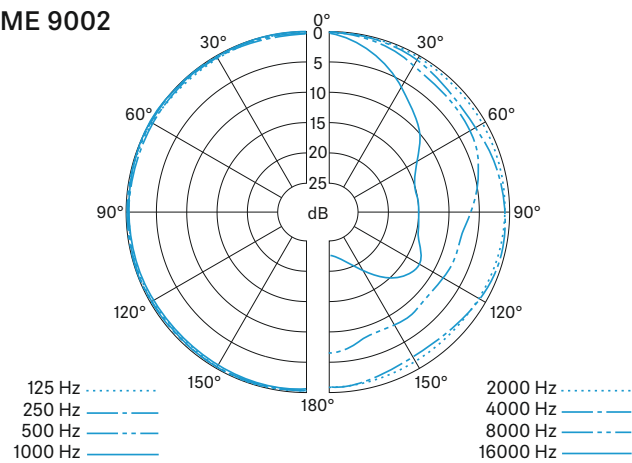

ME 9004

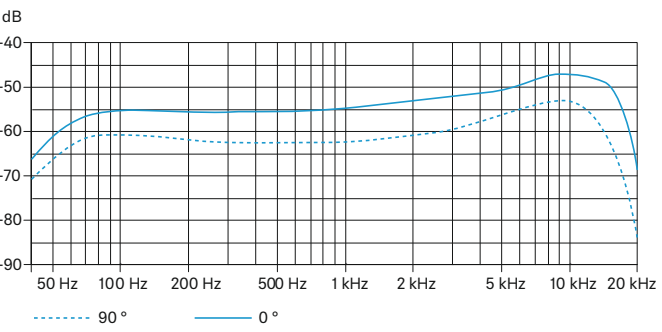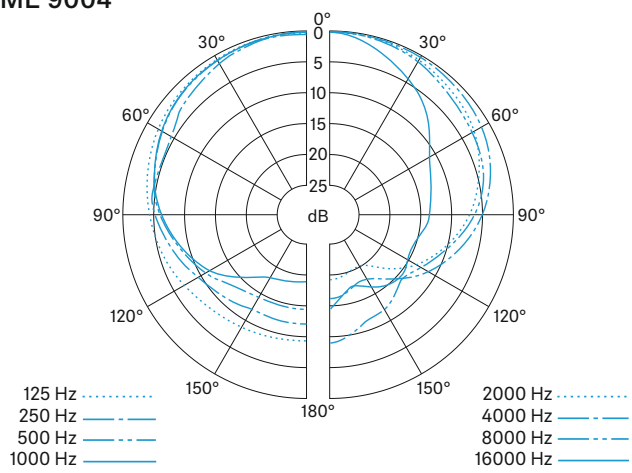

ME 9005

