



MK 4

Instrument Microphone

Quick Guide

Kurzanleitung

Guide de démarrage rapide

Guida rapida

Instrucciones resumidas

Instruções resumidas

Beknopte gebruiksaanwijzing

Krótką instrukcja obsługi

Snabbguide

Kort vejledning

Pikaohje

Σύντομες οδηγίες

Kısa Kılavuz

Краткая инструкция

快速指南

快速使用指南

クイックガイド

요약 안내서

SENNHEISER



www.sennheiser.com/download

Sennheiser electronic SE & Co. KG


Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 06/24, 587413/A06



In the box




Setup

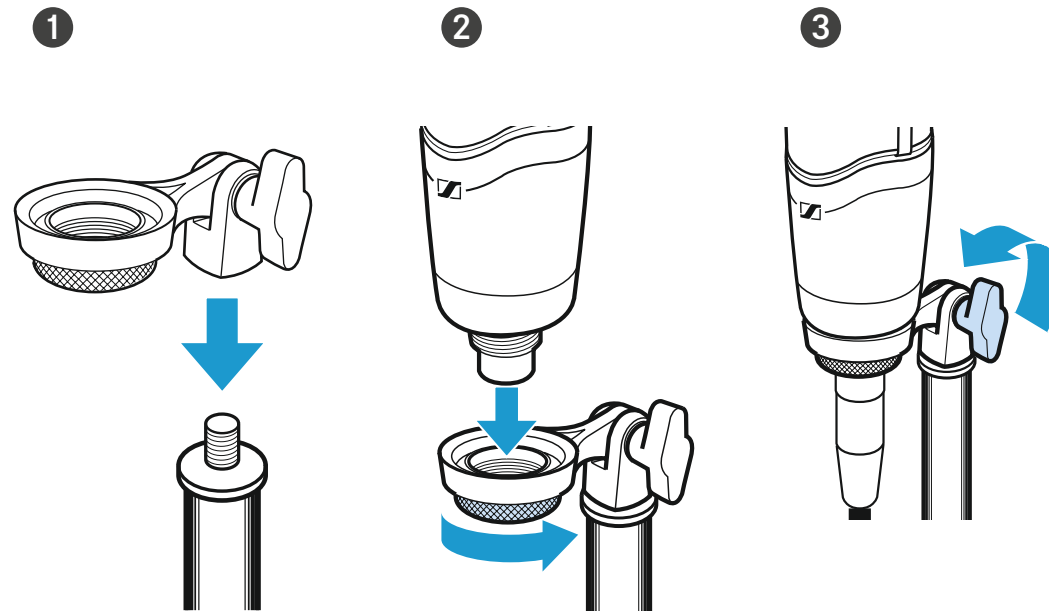




Recording

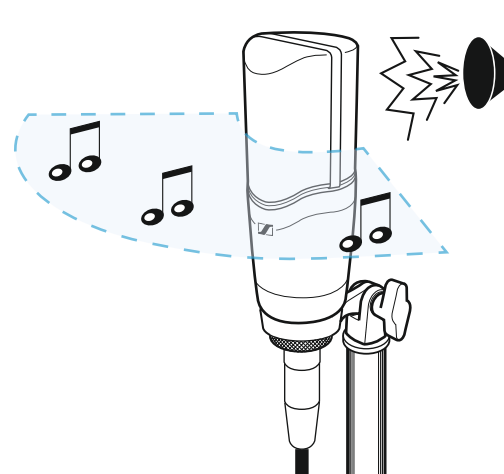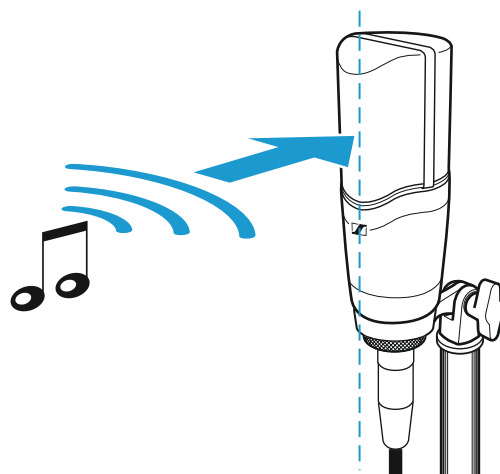

Cleaning


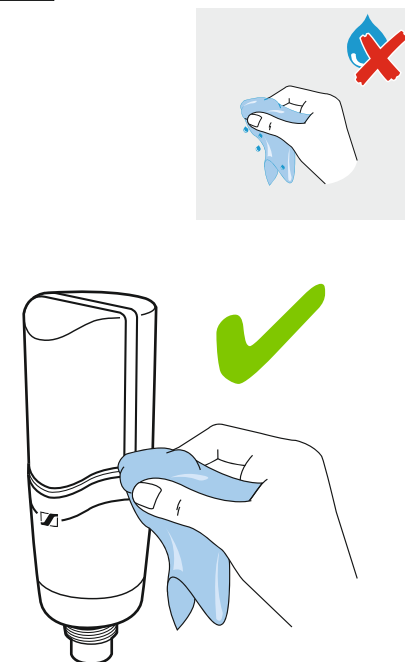


Accessories

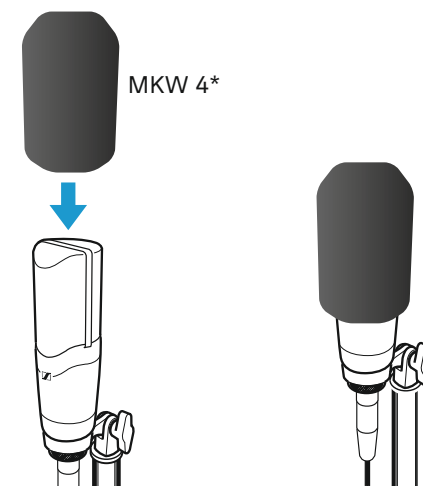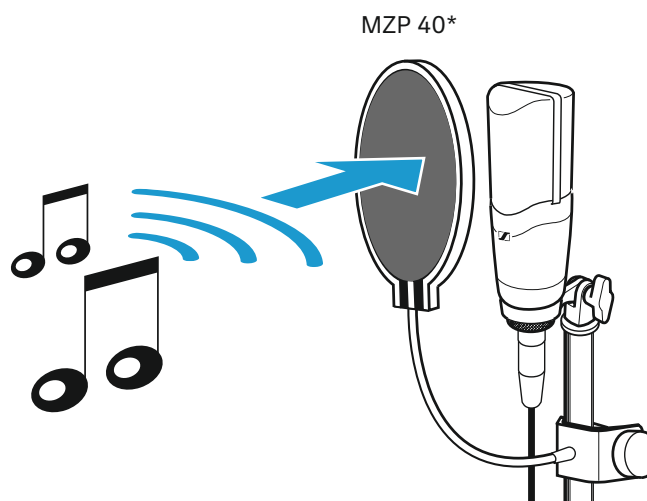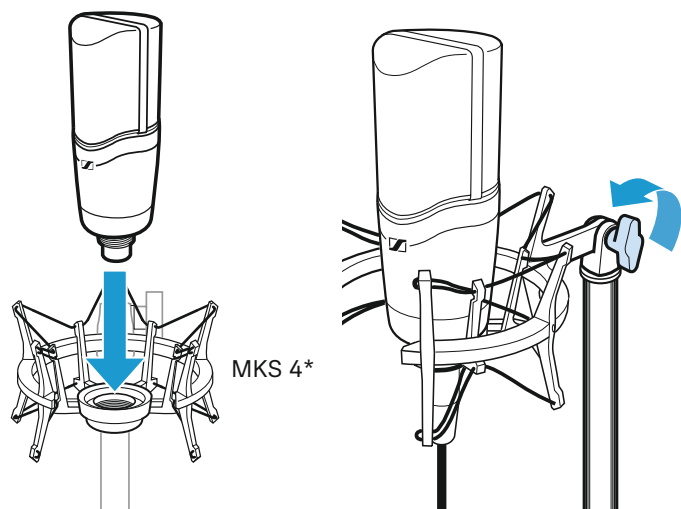


*optional accessories

Polar pattern and frequency response

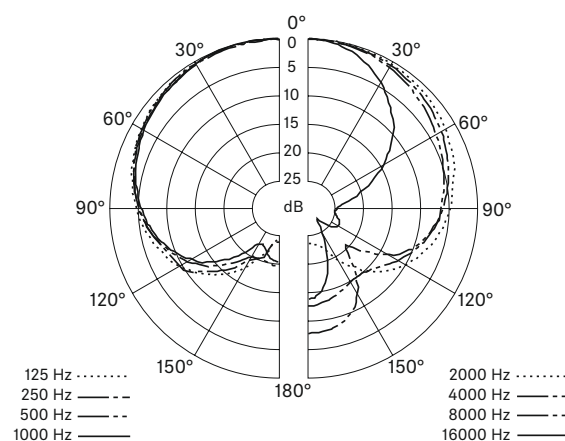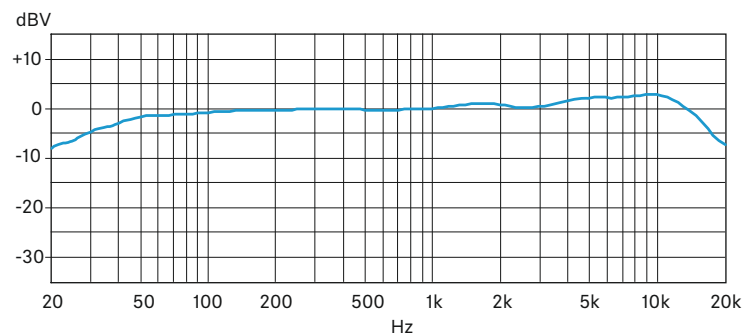

Connector assignment

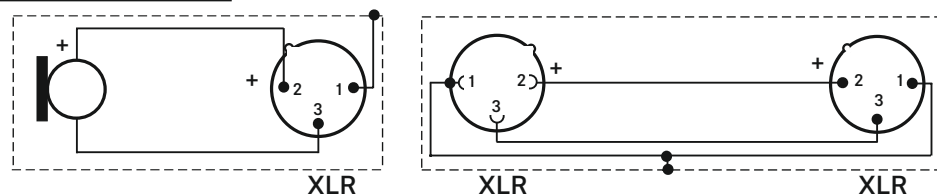

Specifications

Transducer principle	externally polarized condenser microphone
Diameter of diaphragm	25.4 mm / 1"
Acoustic operating principle	pressure gradient transducer
Pick-up pattern	cardioid
Frequency response	20 – 20,000 Hz
Sensitivity	25 mV/Pa
Max. SPL	140 dB
Equivalent noise level CCIR-weighted	10 dB(A) 20 dB
Dynamic range	130 dB
Nominal impedance	approx. 50 Ω
Min. terminating impedance	1 kΩ
Power supply	phantom powering 48 V (P48)
Current consumption	3.1 mA
Diameter	approx. 57 mm
Length	approx. 160 mm
Weight	approx. 485 g
Operating temperature	0 °C to +40 °C
Storage temperature	-20 °C to +70 °C