



MK 8

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guia rápida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Σύντομες οδηγίες
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
요약 안내서


SENNHEISER




www.sennheiser.com/download

Sennheiser electronic SE & Co. KG
Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com
Printed in Germany, Publ. 03/25, 587474/A03


In the box

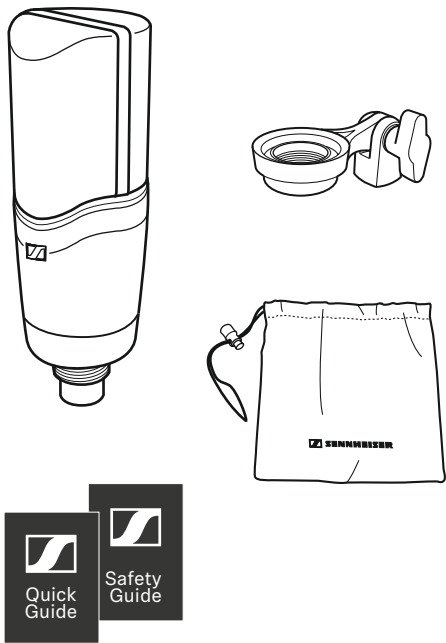

Overview

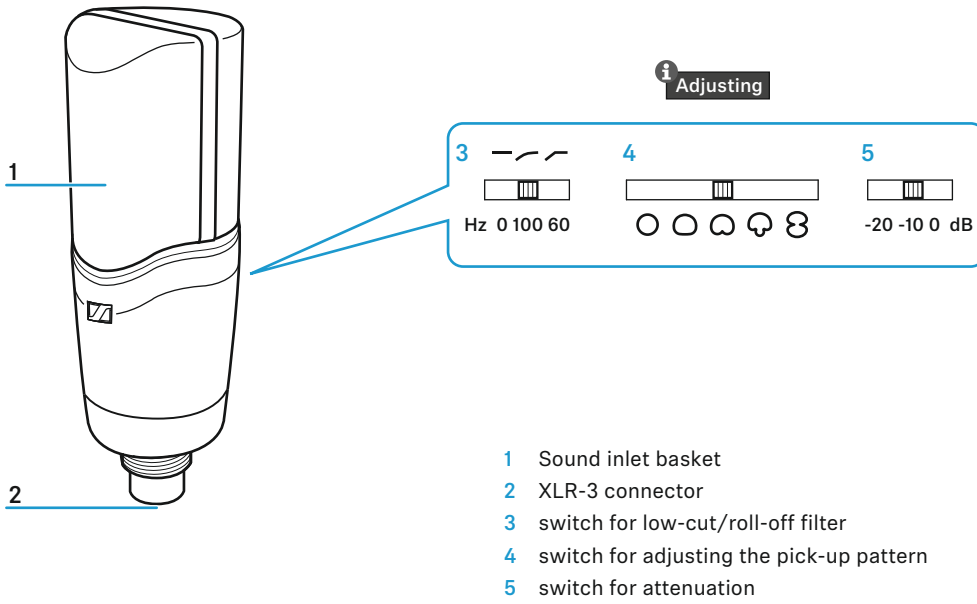


Setup

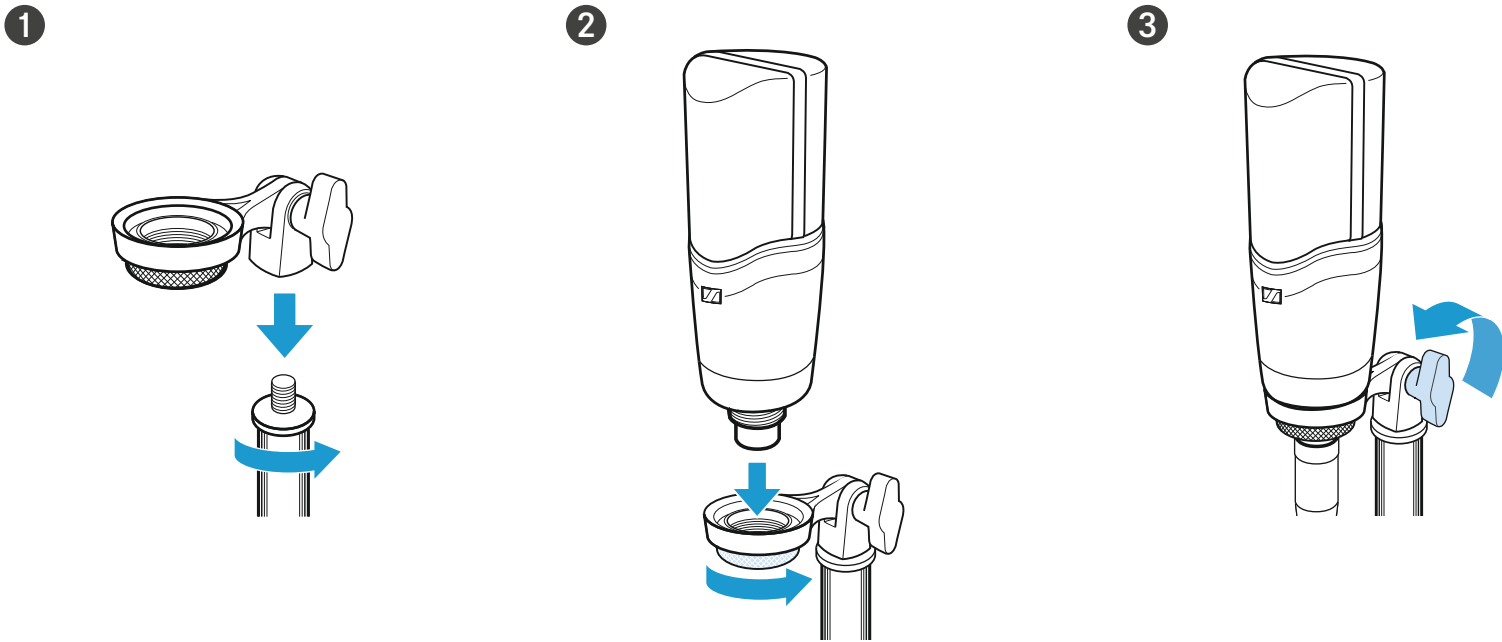

Adjusting

low-cut/roll-off filter



Hz 0 100 60

- off
- roll-off, -6 dB/oct.
- low-cut, -18 dB/oct.


attenuation



-20 -10 0 dB


- 20 dB reduces by 20 dB
- 10 dB reduces by 10 dB
- 0 dB no attenuation

pick-up pattern







- omni-directional
- wide cardioid
- cardioid
- super-cardioid
- figure-of-eight

Cleaning

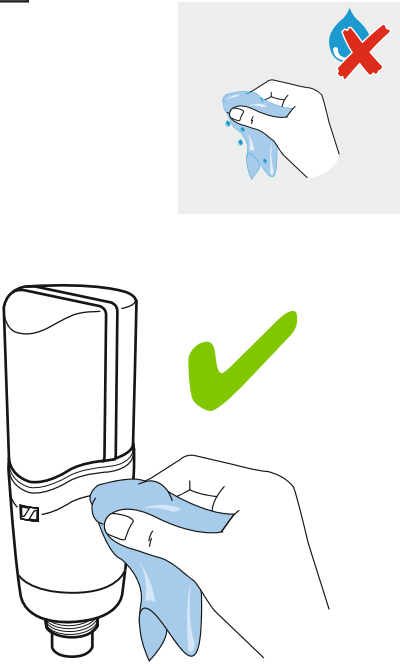

Accessory

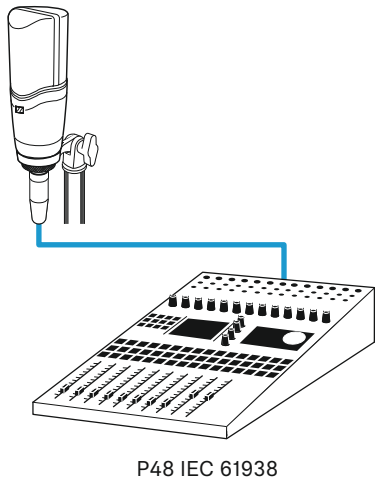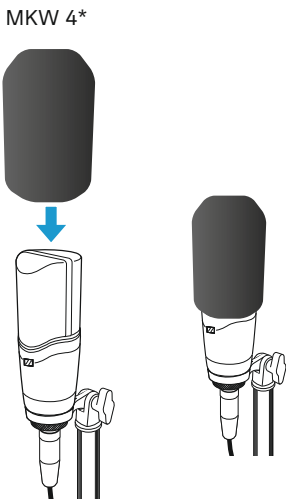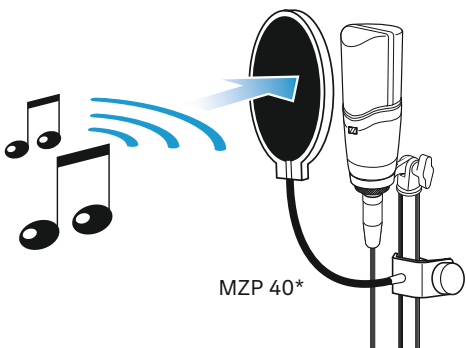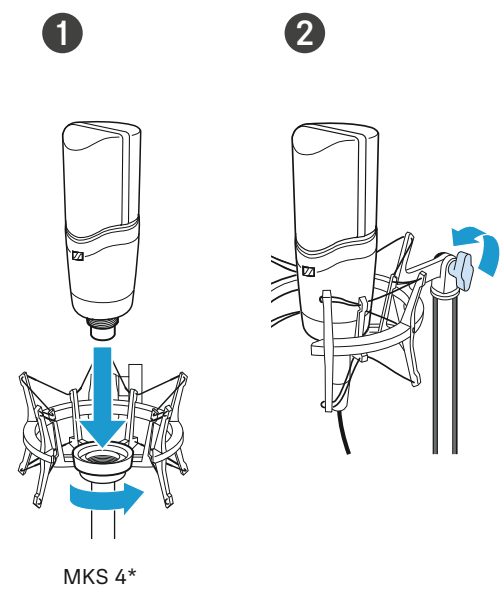


*optional accessories

Specifications

Transducer principle	externally polarized dual diaphragm condenser microphone
Diameter of diaphragm	25.4 mm / 1"
Acoustic operating principle	pressure gradient transducer
Pick-up pattern, switchable	omni-directional, wide cardioid, cardioid, super-cardioid, figure-of-eight
Frequency response	20 – 20,000 Hz
Sensitivity	14.1 mV/Pa (-37 dBV)
Max. SPL	142 dB (attenuation: 0 dB)
Equivalent noise level	A-weighted: 10 dB(A) CCIR-weighted: 16 dB
Dynamic range	132 dB
Nominal impedance	50 Ω
Min. terminating impedance	1 kΩ
Phantom powering	48 V ±4 V (P48, IEC 61938)
Low cut/roll-off filter, switchable	linear
Attenuation, switchable	0 dB, -10 dB, -20 dB
Current consumption	4.1 mA
Temperature range	Operation: 0 °C to +40 °C Storage: -10 °C to +60 °C
Dimension	Ø 57 mm x 160 mm
Weight	485 g

Connector assignment

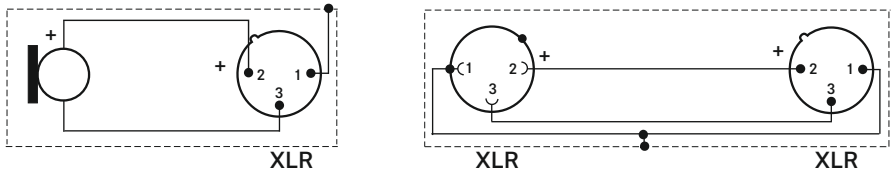

Polar pattern and frequency response

