



ACA 3

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guida rapida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Γρήγορος οδηγός
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
퀵 가이드


SENNHEISER




www.sennheiser.com/download

Sennheiser electronic SE & Co. KG
Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com
Printed in Germany, Publ. 02/25, 583927/A04

ACA 3

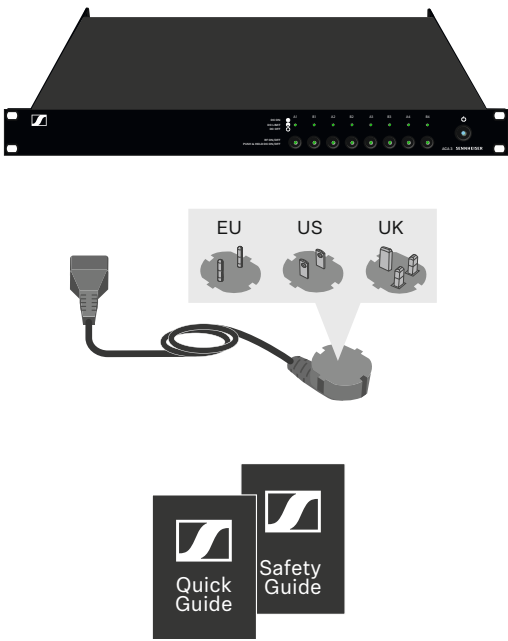


Setup

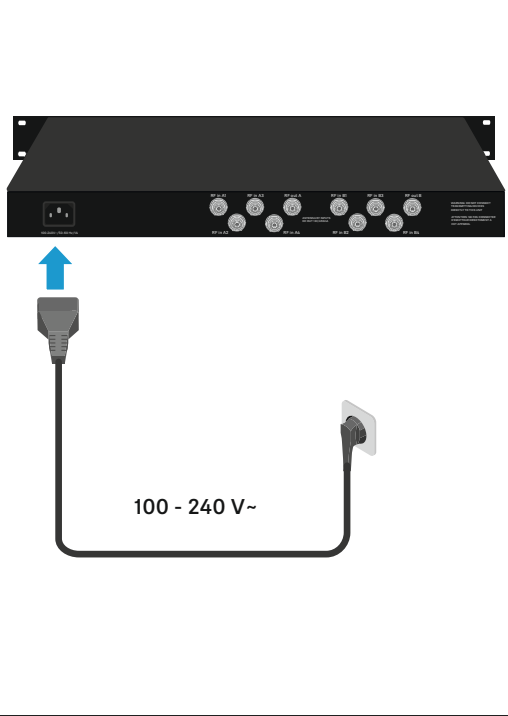


Operating elements

Front

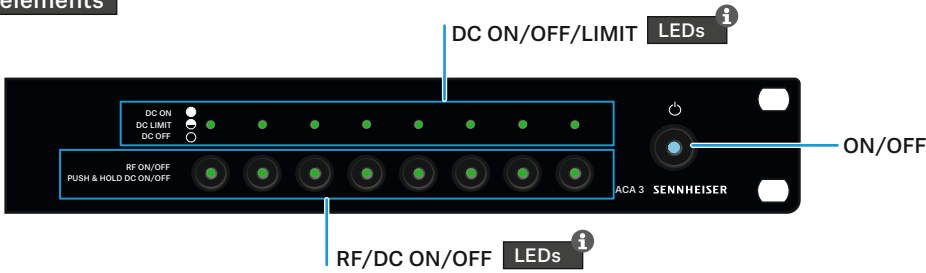

Back

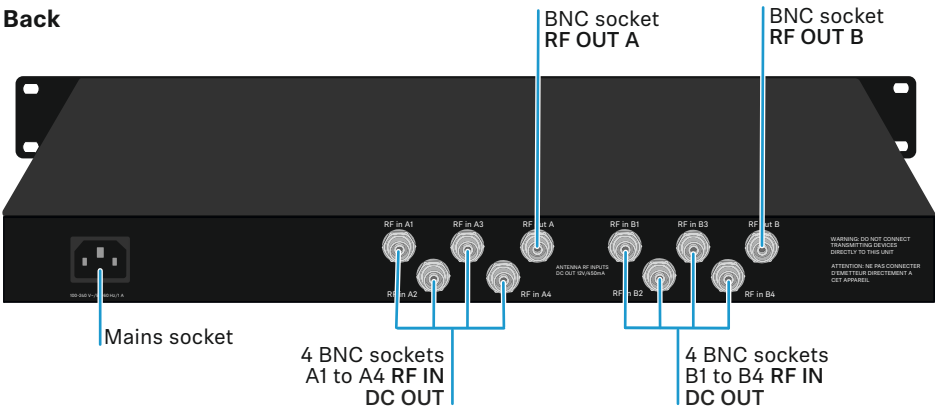


ON/OFF

ON/Standby



	short	long
ACA 3	on	standby
LED	on	blinking
LED RF	by memory	off
LED DC	by memory	off


OFF

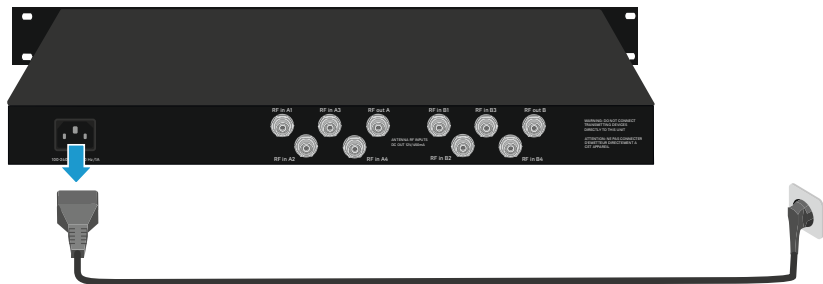


Specifications

Frequency range	470 - 798 MHz
Gain	0 dB (± 3 dB) @ 470-790 MHz
Output voltage	12 V, 250 mA max (overload protected)
Connector	BNC female, 50 "
Power supply	100-240 V AC/ 50-60 Hz / 1A
RF input	+10 dBm max 10 mW / channel
RF output	IP3: >37 dBm (typ.); 1 dB cp: >20 dBm
Specials	Channel isolation (when switched OFF): 69 dB (typ.)
Operating relative humidity	5 to 95%
Operating temperature range	-10 °C to +40 °C
Storage temperature range	-20 °C bis +70 °C
Dimensions (incl. rack mount ears)	approx. 43 x 483 x 205 mm
Format	19", 1U
Weight (incl. plug, cable)	approx. 2750 g

Setup

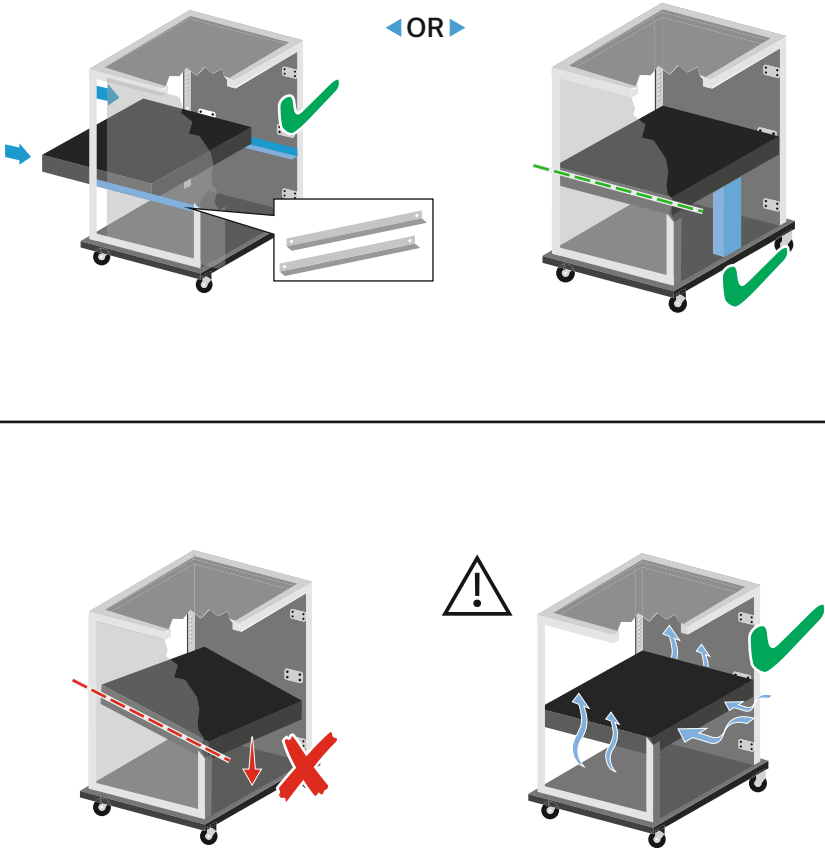


Operating modes

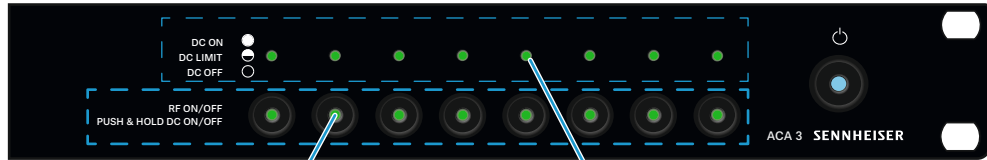


	short	long
RF	on/off	—
DC	—	on/off

LEDs	DC	RF
on	✓	✓
blinking	LIMIT	—
off	✗	✗

Connecting devices

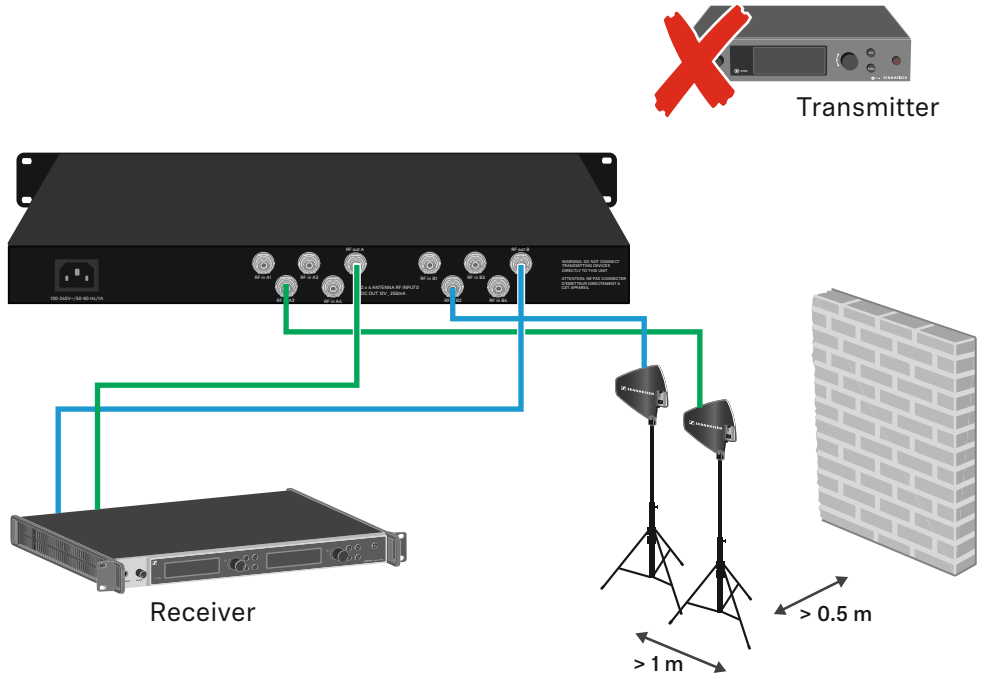

Example 1: Studio Complex

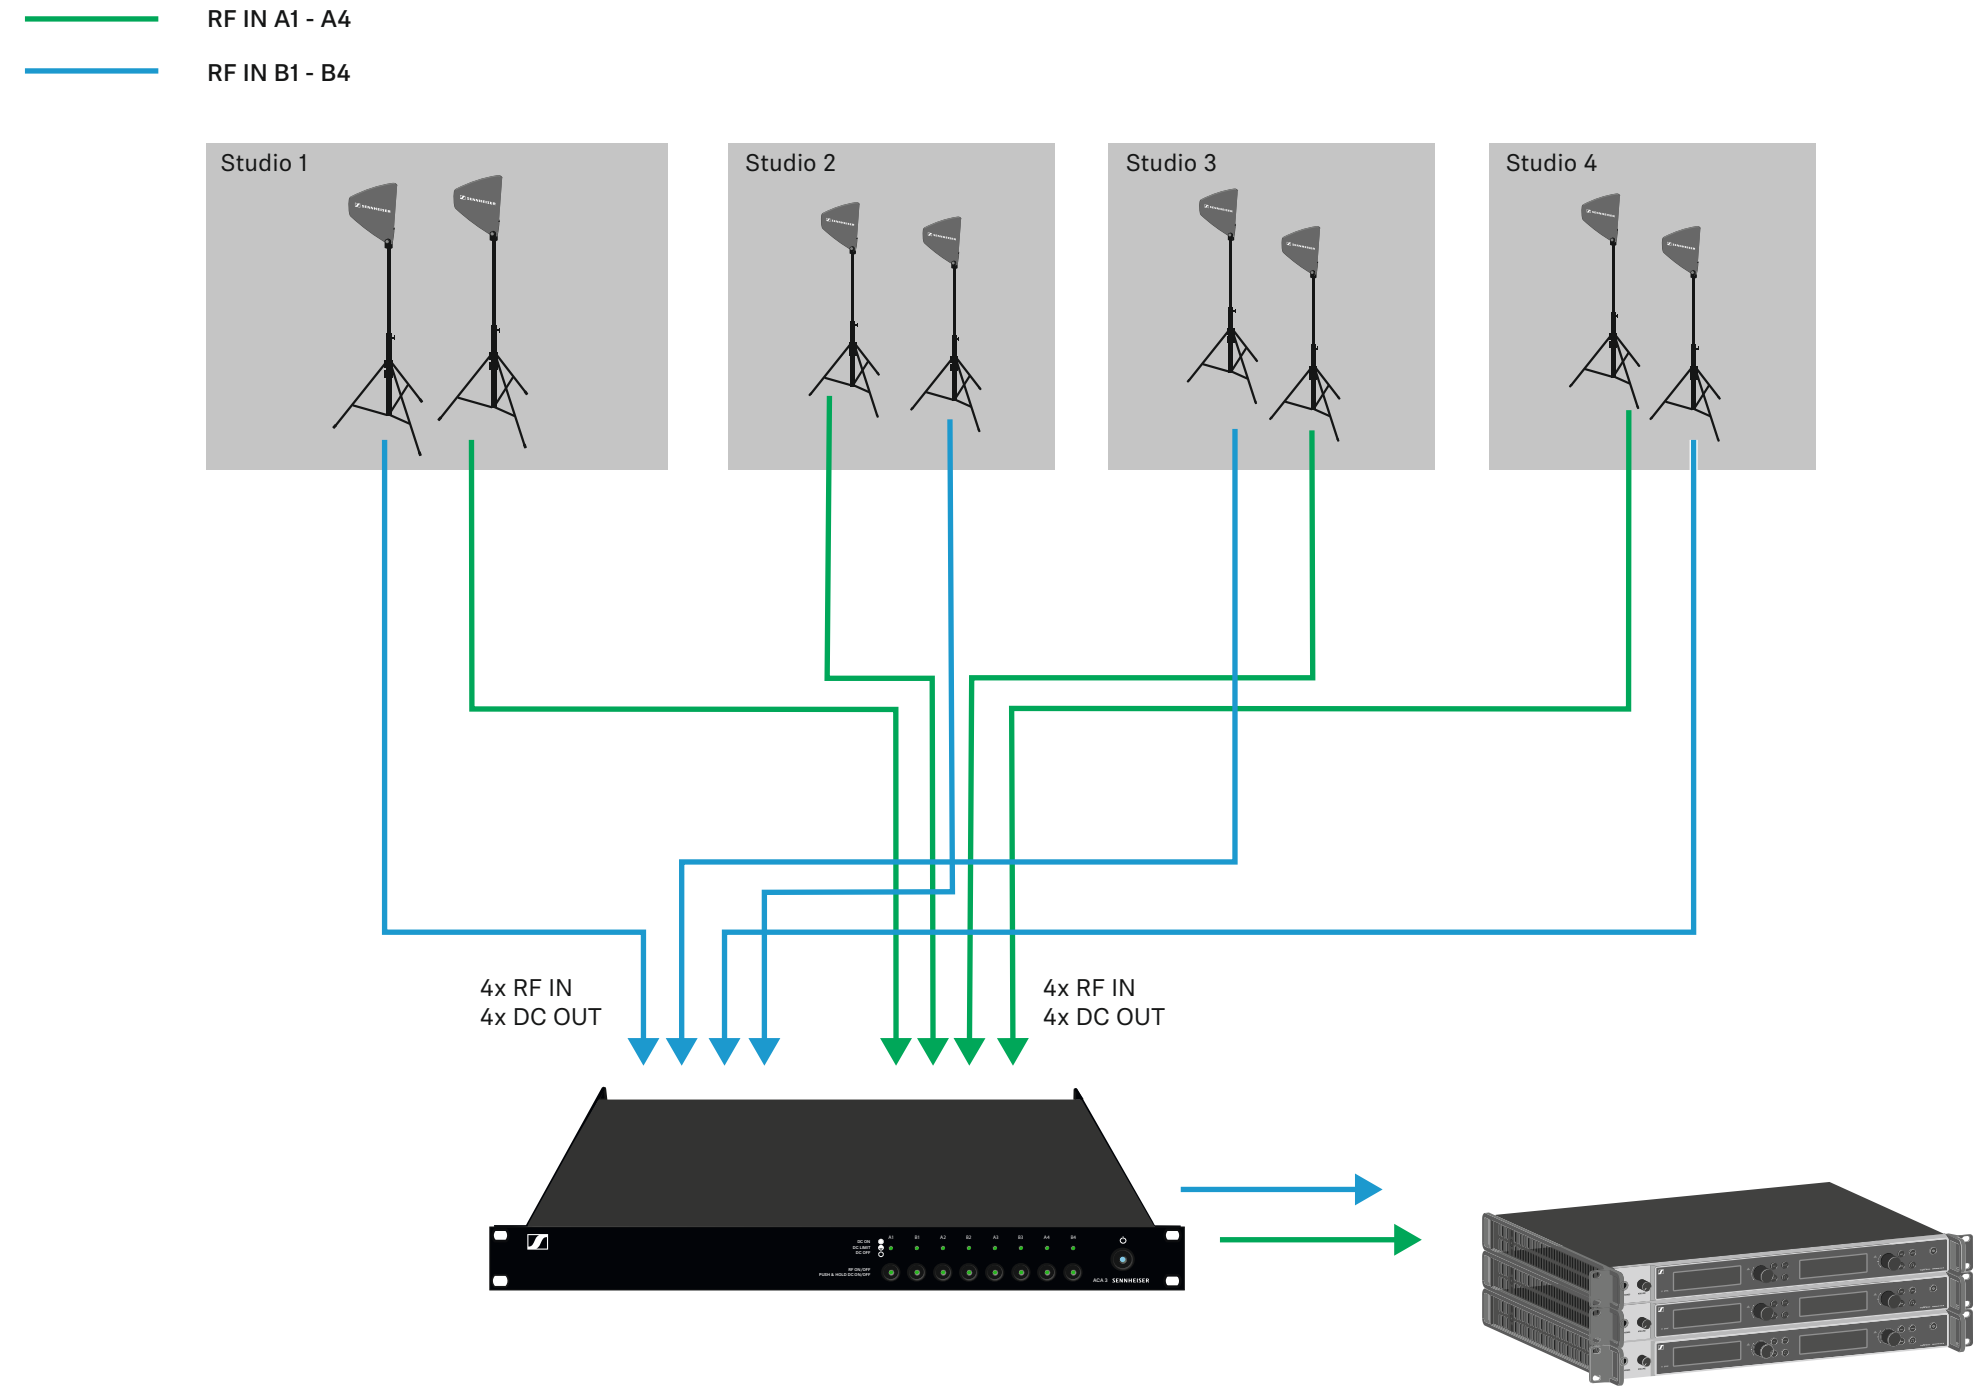

Example 2: Large Church

