



FRONT View

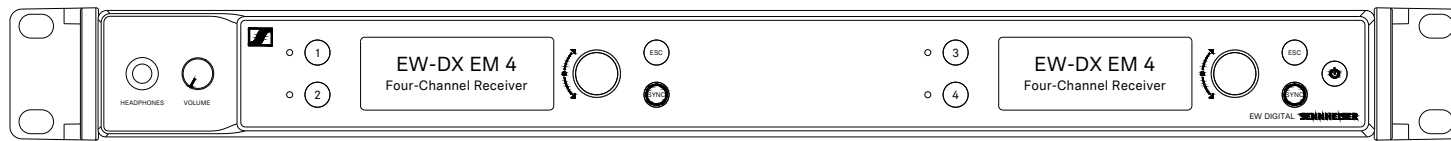

- ↑
Headphones Volume CTRL
6.3mm (1/4"), Stereo Jack
- ↑
Channel Selector
- ↑
OLED Display
Channels 1 & 2
- ↑
Rotary Encoder
- ↑
Channel Selector
- ↑
OLED Display
Channels 3 & 4
- ↑
Rotary Encoder
- ↑
Power Button

REAR View

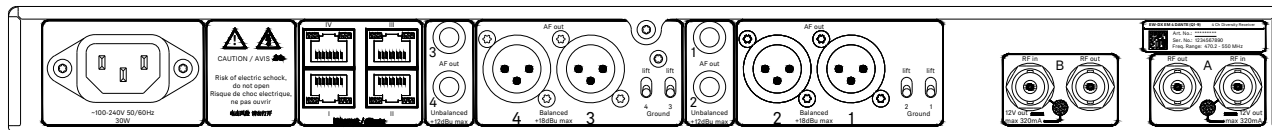

- ↑
DIN IEC 60320-C14
AC Power Input
- ↑
4x RJ45 Shielded
Receptacles
- ↑
2x 6.3mm (1/4")
Phone Jacks
- ↑
2x XLR-3 Male
Receptacles
- ↑
2x 6.3mm (1/4")
Phone Jacks
- ↑
2x XLR-3 Male
Receptacles
- ↑
2x BNC Female
50 Ohm Receptacles
- ↑
2x BNC Female
50 Ohm Receptacles

Evolution Wireless Digital
WIRELESS MICROPHONE SYSTEMS

<i>Drawing name</i>	<i>Revision</i>
EW-DX System Drawings	1.0

<i>Sheet title</i>
EM 4 Dante, Four-Channel Receiver

<i>Description</i>
Detailed view, Front & Rear

EM 2 Dante / EM 4 Dante
Available Frequency ranges

Q1-9	470.2 - 550 MHz
R1-9	520 - 607.8 MHz
S2-10	614.2 - 693.8 MHz
U1/5	823.2 - 831.8 MHz 863.2 - 864.8 MHz
V5-7	941.7 - 951.8 MHz 953.05 - 956.05 MHz 956.65 - 959.65 MHz
Y1-3	1785.2 - 1799.8 MHz

EW-D & EW-DX
Accessories Frequency ranges

EW-D ASA (Antenna Splitter, Active)	
Q-R-S	470 - 694 MHz
T-U-V-W	694 - 1075 MHz
X-Y	1350 - 1805 MHz

EW-D AB & EW-D Half Wave Dipole	
Q	470 - 550 MHz
R	520 - 608 MHz
S	606 - 694 MHz
U	823 - 865 MHz
V	902 - 960 MHz
Y	1785 - 1805 MHz

AWM wall-mount antenna	
UHF I	470 - 694 MHz
UHF II	823 - 1075 MHz
1G8	1785 - 1805 MHz

→ Please contact your local Sennheiser representative for available Evolution Wireless Digital frequency ranges in your market