



MEB 102 | MEB 102-L MEB 104 | MEB 104-L

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guida rapida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Γρήγορος οδηγός
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
퀵 가이드

SENNHEISER




www.sennheiser.com/download

Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 11/23, 549115/A05

In the box

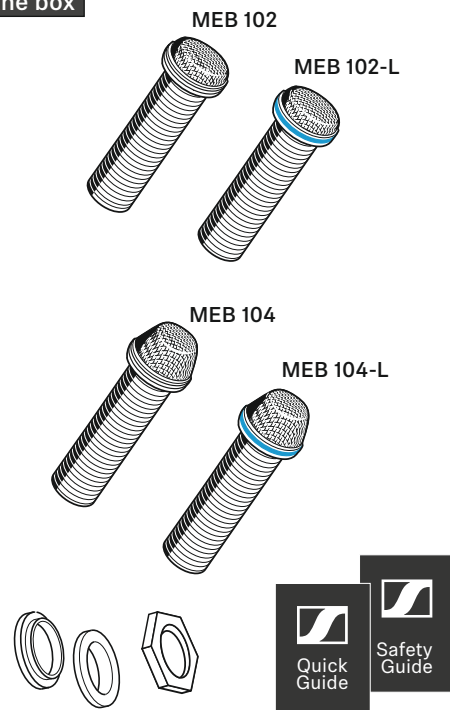

LED status

MEB 102-L + MEB 104-L




microphone active




microphone muted


Setup





XLR-3/XLR-5 cable
not included







XLR-3



XLR-5




Mounting

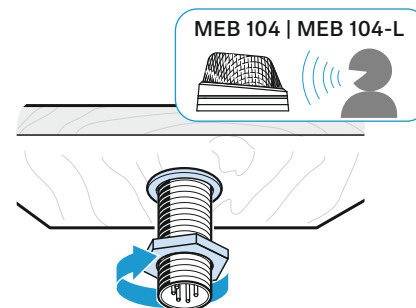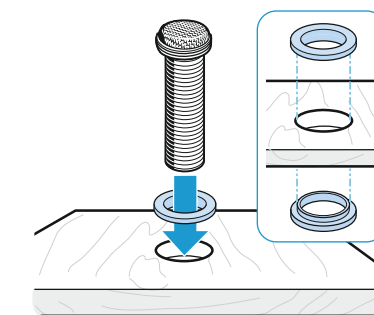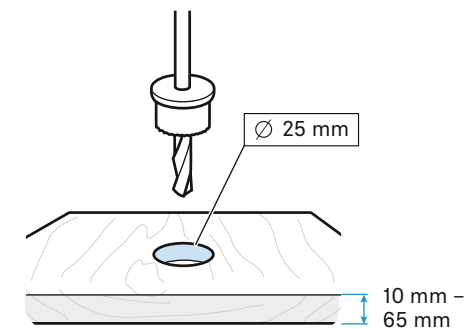

Connector assignment

MEB 102




MEB 104



- 1 ground
- 2 microphone +
- 3 microphone -

MEB 102-L



MEB 104-L



- 1 ground
- 2 microphone +
- 3 microphone -
- 4 LED green (trigger signal)
- 5 LED red (default)

Specifications

Microphones	MEB 102		MEB 102-L		MEB 104		MEB 104-L	
Pick-up pattern	omni-directional					cardioid		
Frequency response	40 Hz – 20,000 Hz							
Acoustic principle	pressure zone microphone							
Nominal impedance (at 1 kHz)	200 Ω							
Sensitivity	16 mV/Pa					14 mV/Pa		
Max. SPL	125 dB at 1 kHz							
Equivalent noise level (CCIR-weighted)	21 dB(A)					28 dB(A)		
Power supply	48 V phantom power							
Current consumption	3 mA		6 mA (microphone/signal light ring: 3 mA each)		6 mA (microphone/signal light ring: 3 mA each)		3 mA	
Connector	XLR-3		XLR-5		XLR-5		XLR-3	
Temperature	operation: -10 °C – +50 °C storage: -25 °C – +70 °C							
Dimensions	microphone head: Ø approx. 29 mm tread: Ø approx. 20 mm rubber rings: Ø approx. 23 mm							
Weight	approx. 58 g					approx. 60 g		