



SENNHEISER

Headmic 4



www.sennheiser.com/documentation

Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com


Printed in Germany, Publ. 11/25, 592826 / A03




www.sennheiser.com/download

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guía rápida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide
Kort vejledning
Pikaohje
Σύντομες οδηγίες
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
요약 안내서


In the box

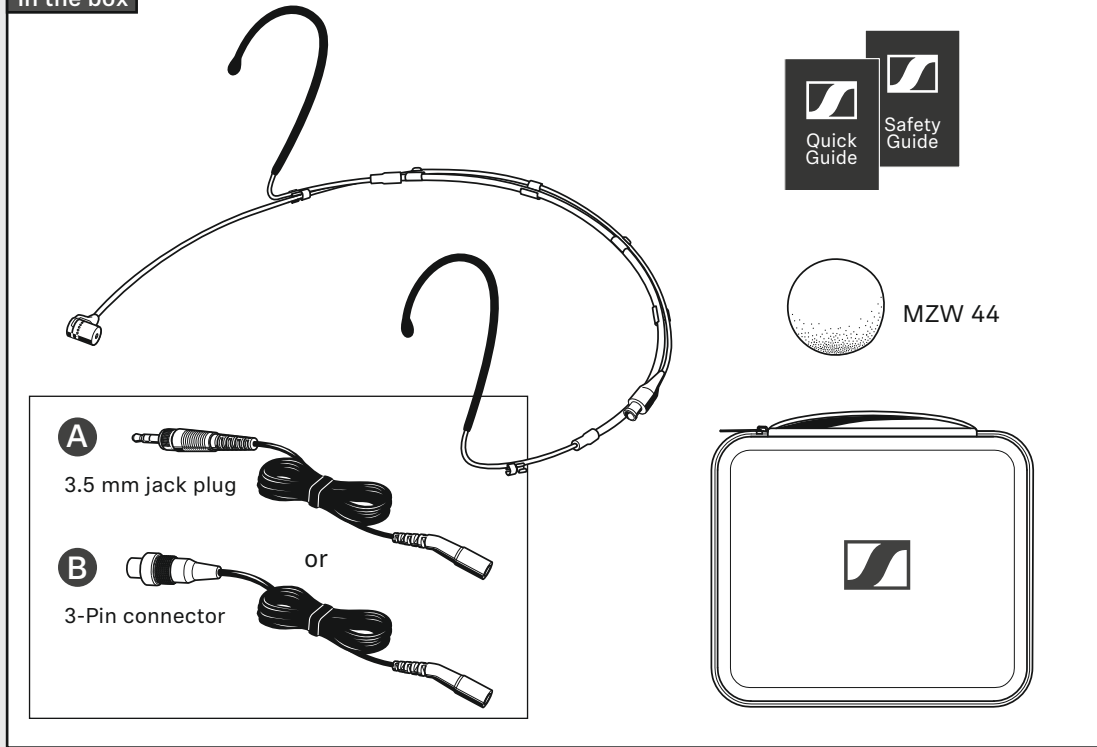

Setup

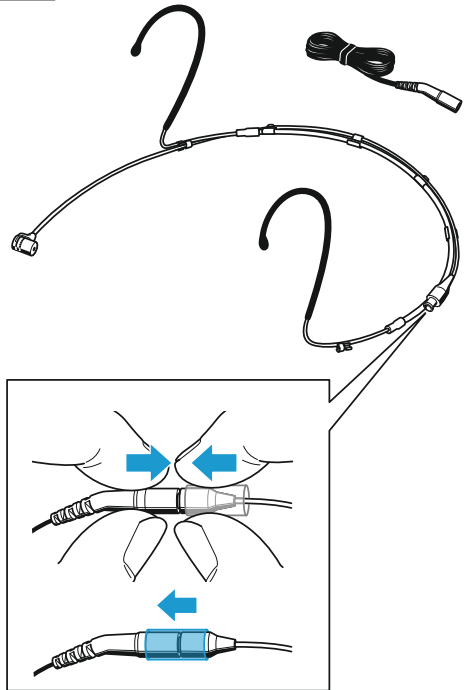


3.5 mm jack plug

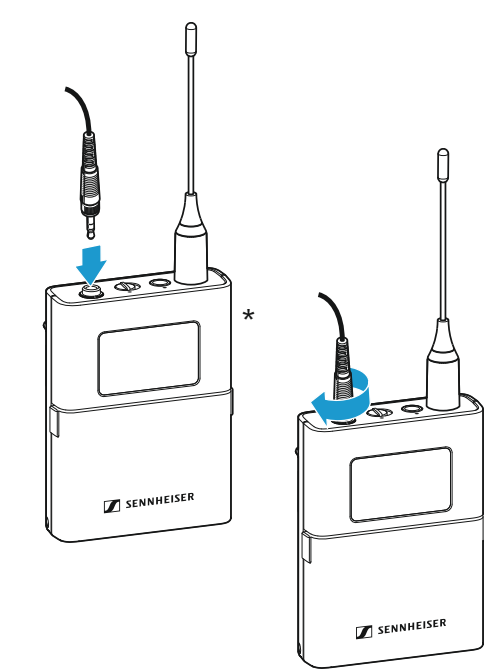


*not included





3-Pin connector

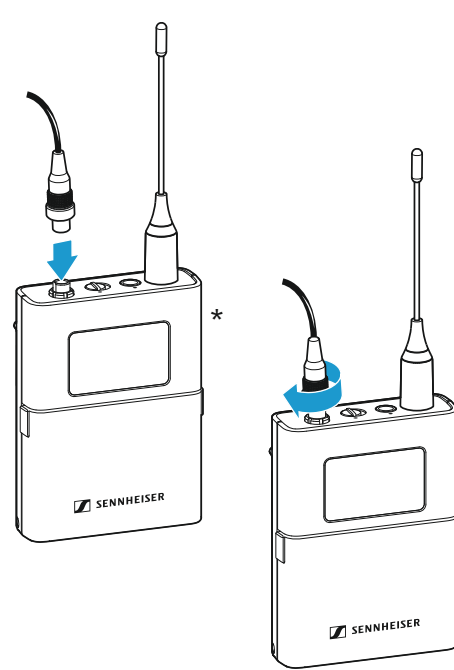




*not included

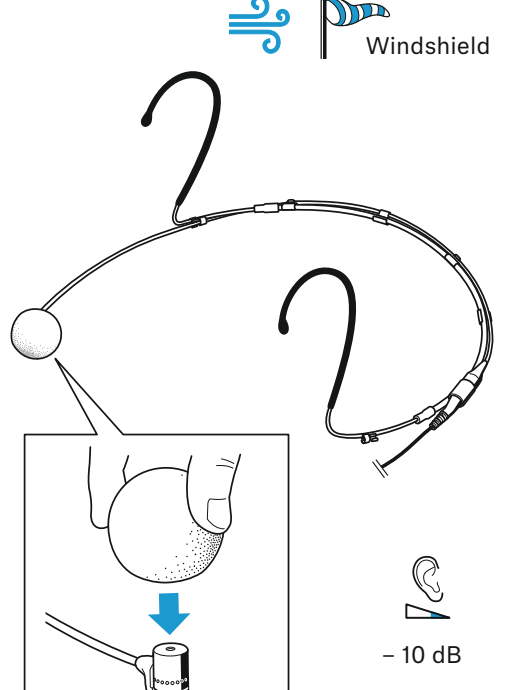


Wearing

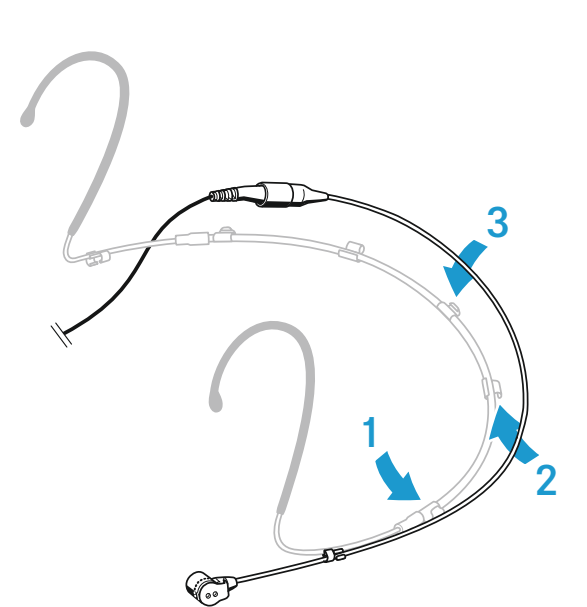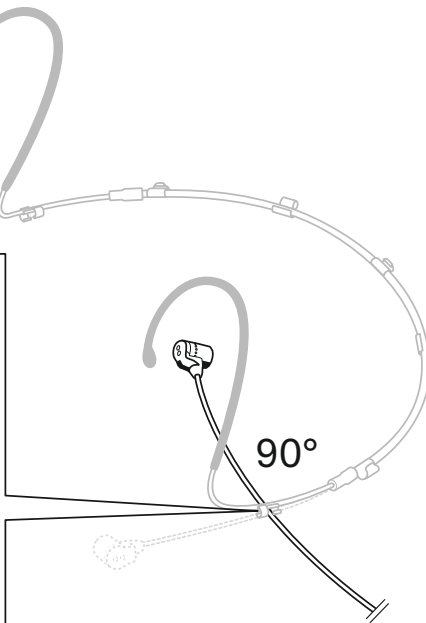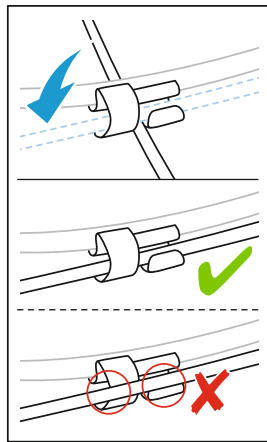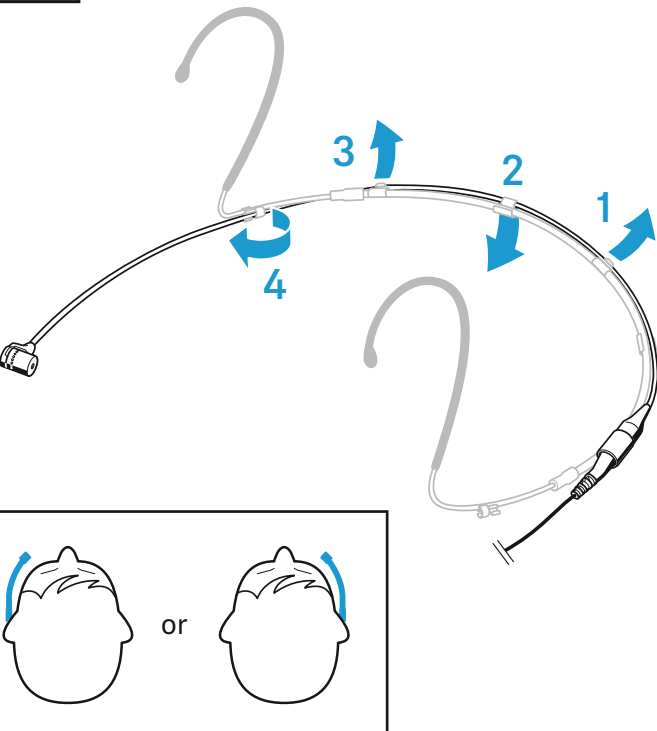


Adjusting

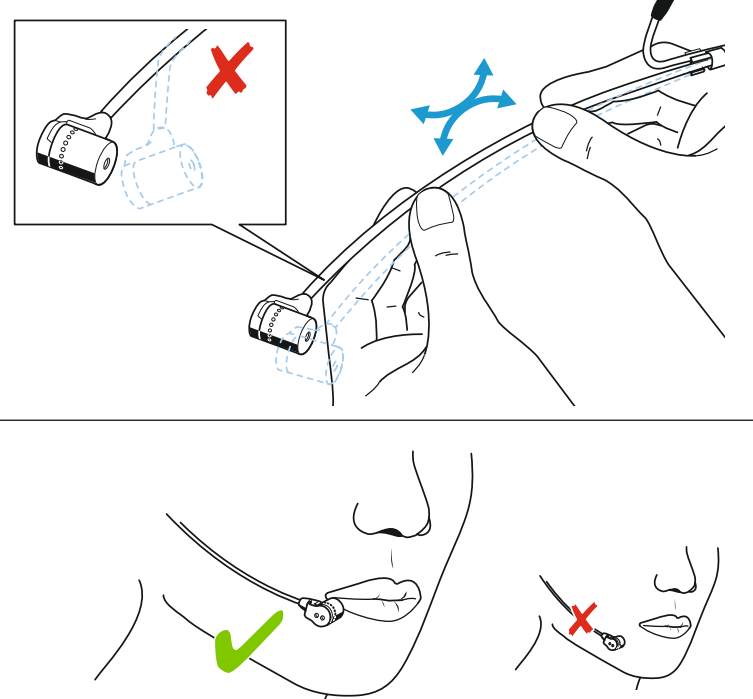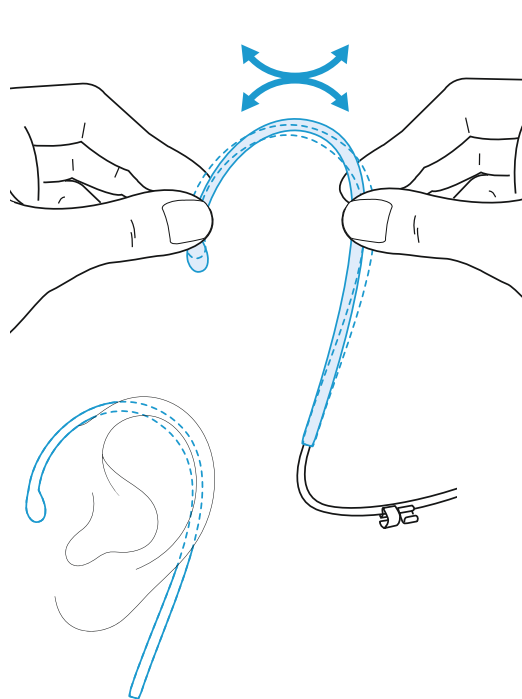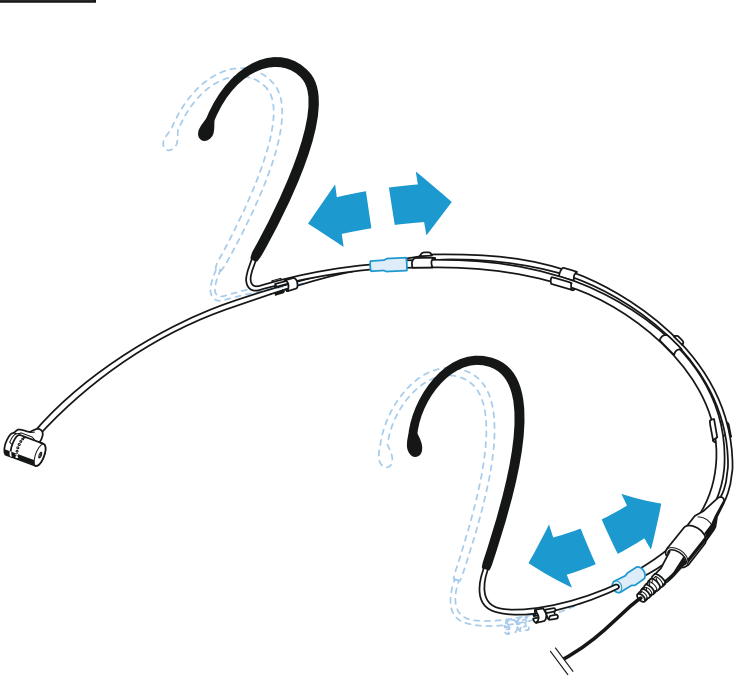



Accessory

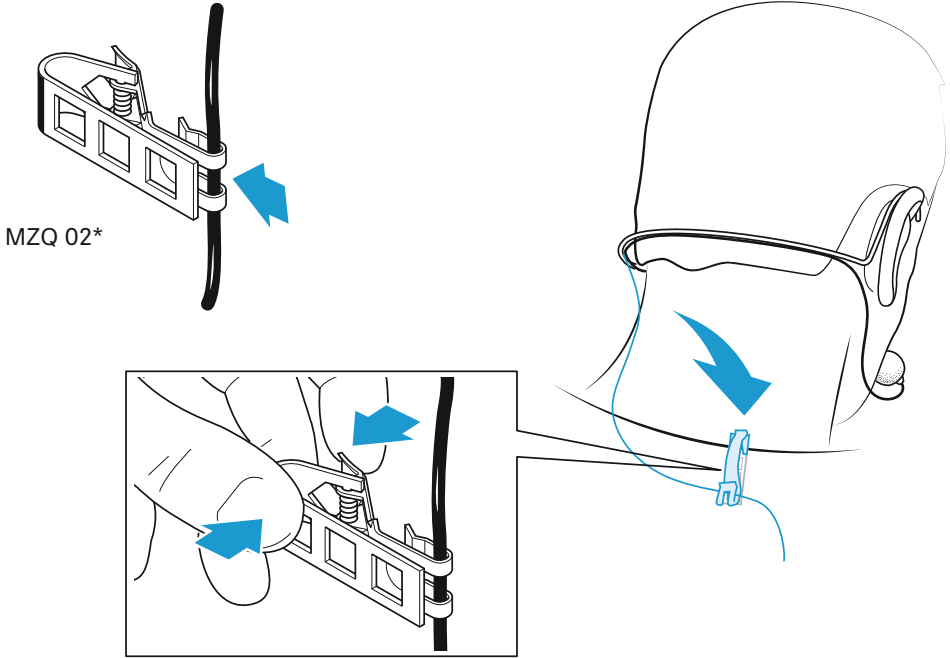

Storing and transporting

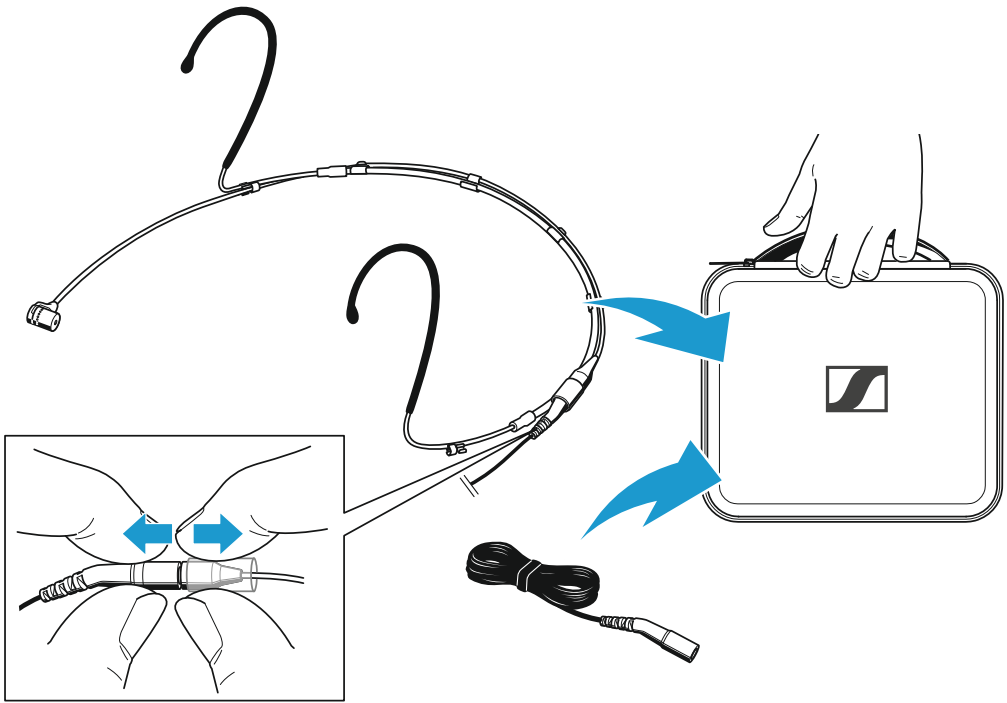


Cleaning

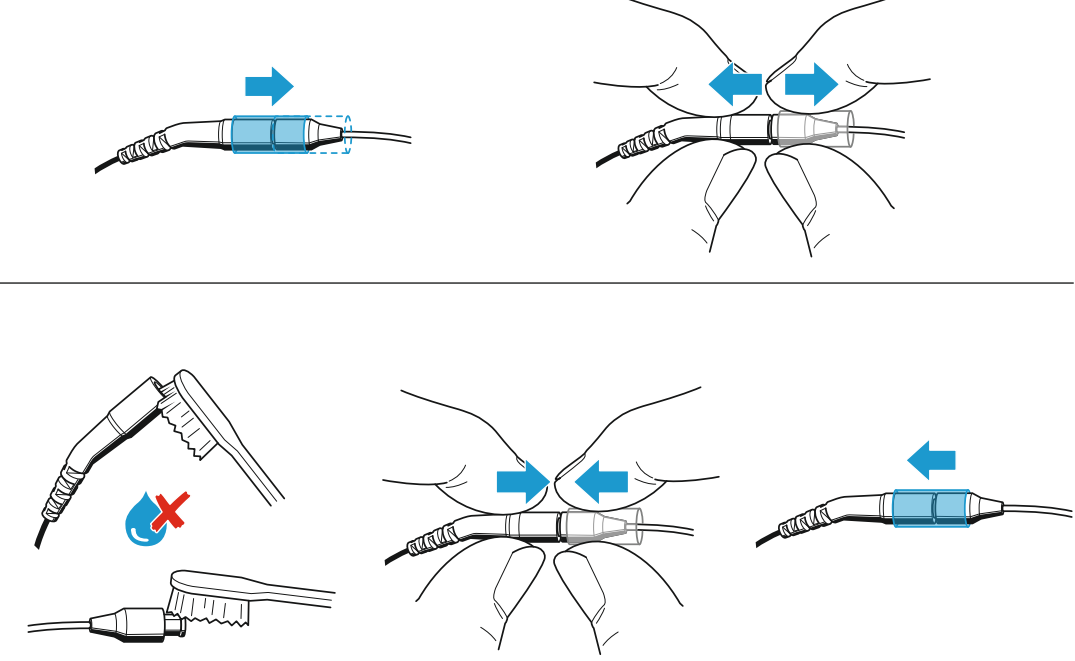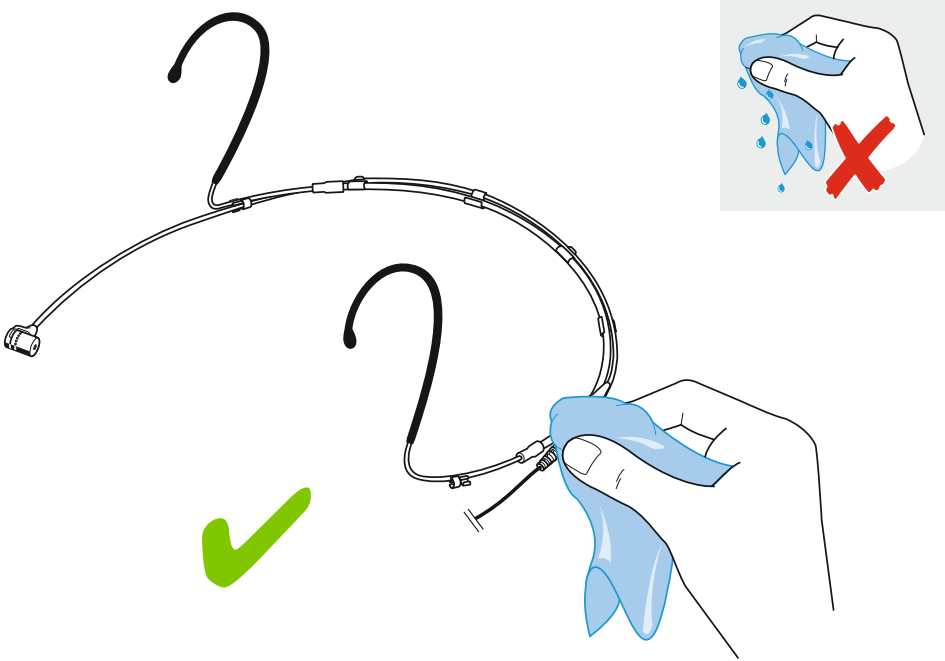

Specifications

Frequency response	20 – 20,000 Hz ± 2.5 dB
Pick-up pattern	cardioid
Nominal impedance	1.2 k Ω
Min. terminating impedance	4.7 k Ω
Sensitivity	8 mV/Pa ± 2.5 dB
Diameter of mic capsule	4.7 mm
Max. sound pressure level	143 dB
Equivalent noise level	30 dB(A)
Supply current	approx. 240 μ A
Power supply	4.5 – 15 V
Operating temperature	-10 °C to +50 °C
Storage temperature	-20 °C to +70 °C
Relative humidity	max. 90 %
Cable length	1.6 m
Diameter of boom arm	1.1 mm
Weight (without cable)	7 g
Connector	3.5 mm jack plug or 3-Pin connector

Polar pattern

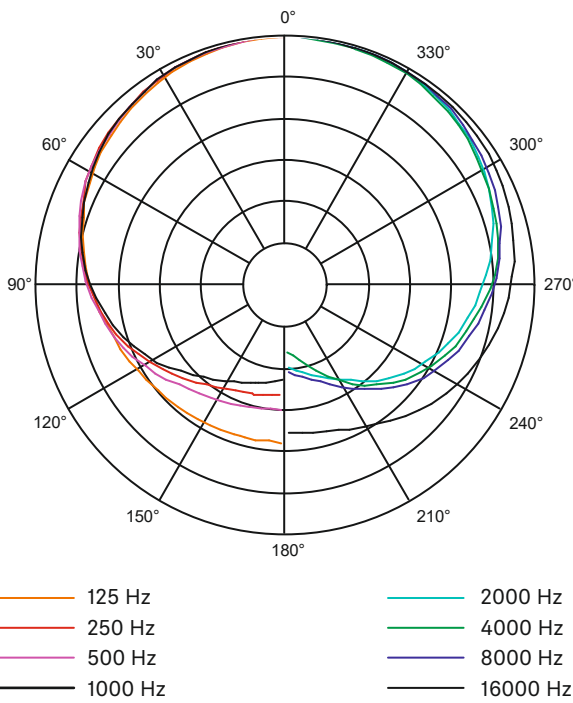

Frequency response

