



MKE 1 Clip-On Microphone



Whether used in musicals, live shows, broadcasts or presentations, the MKE 1, Sennheiser's smallest clip-on microphone, delivers its best performance exactly where a microphone needs to be invisible – and still offers great sound without any trade-offs.

Shielded from sweat by a new protective membrane, the MKE 1 lasts longer than other clip-on microphones, especially under the tough conditions of live performance. Its special gauze and an additional protective cap protect it from most moisture and mean that it only records what it's supposed to: perfect sound.

The MKE 1 builds on this feature with its robustness: its cable with low impact noise and integrated anti-kink protection makes it a microphone on which you can fully rely.

FEATURES

- Great strengths - small microphone
- Very small dimensions (3.3 mm capsule diameter)
- High maximum sound pressure level (142 dB)
- Very high speech intelligibility; clear, pleasant treble
- Full, natural sound with low ambient noise
- Thin (1 mm diameter) and robust cable; flexible with minimum handling noise
- Very sweat-resistant due to protective membrane
- Flexible tubes for attaching the microphone with clips or adhesive tape

DELIVERY INCLUDES

- MKE 1 microphone
- MZC 1-1 frequency response cap, small
- MZC 1-2 frequency response cap, large
- 3 make-up protection caps
- MKE 1 (Black 3-Pin), MKE 1 (White 3-Pin), MKE 1 (Black Open End), MKE 1 (Black EW): MZ 1
- Instruction manual

PRODUCT VARIANTS


Variant	Color	Connector	Applicable to	Article number
MKE 1 (Black 3-Pin)	black	3-pin SE	SK 50/SK 250/SK 6000/ SK 9000/SK 2000/SK 5212	Art. no. 502167
MKE 1 (White 3-Pin)	white	3-pin SE	SK 50/SK 250/SK 6000/ SK 9000/SK 2000/SK 5212	Art. no. 502833
MKE 1 (Brown 3-Pin)	brown	3-pin SE	SK 50/SK 250/SK 6000/ SK 9000/SK 2000/SK 5212	Art. no. 502834
MKE 1 (Beige 3-Pin)	beige	3-pin SE	SK 50/SK 250/SK 6000/ SK 9000/SK 2000/SK 5212	Art. no. 502168
MKE 1 (Beige 3-Pin Paintable)	almond white	3-pin SE	SK 50/SK 250/SK 6000/ SK 9000/SK 2000/SK 5212	Art. no. 502881
MKE 1 (Black Open End)	black	open-ended cable		Art. no. 502046
MKE 1 (Beige Open End)	beige	open-ended cable		Art. no. 502169
MKE 1 (Black EW)	black	3.5 mm jack	ew G3/ew G4/ew D1/ SpeechLine DW/XSW	Art. no. 502876
MKE 1 (Beige EW)	beige	3.5 mm jack	ew G3/ew G4/ew D1/ SpeechLine DW/XSW	Art. no. 502879



MKE 1

Clip-On Microphone

FREQUENCY RESPONSE

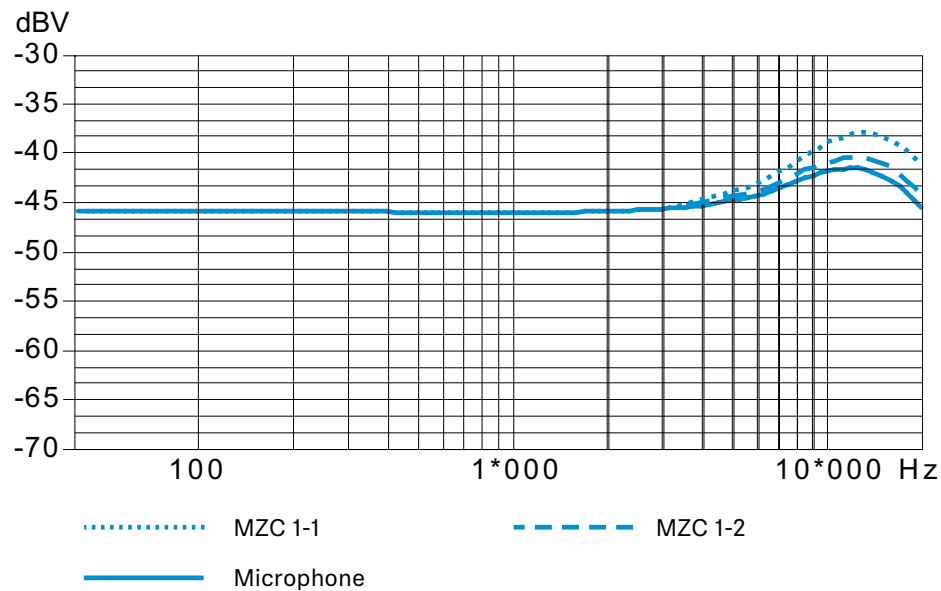

SPECIFICATIONS

Transducer principle	pre-polarized condensor microphone
Pick-up pattern	omni-directional
Sensitivity (free field, no load) (1 kHz)	5 mV/Pa, ± 2.5 dB
Max. SPL at 1 kHz	142 dB
Frequency response	20 to 20.000 Hz ± 2.5 dB
Equivalent noise level	
A-weighted	27 dB
CCIR-weighted	39 dB
Connector	see product variants
Cable length	approx. 1.60 m
Diameter of the microphone	3.3 mm
Weight	0.1 g