



A + B IE 100 PRO Wireless
(Model: SEBT1)



A IE 100 PRO

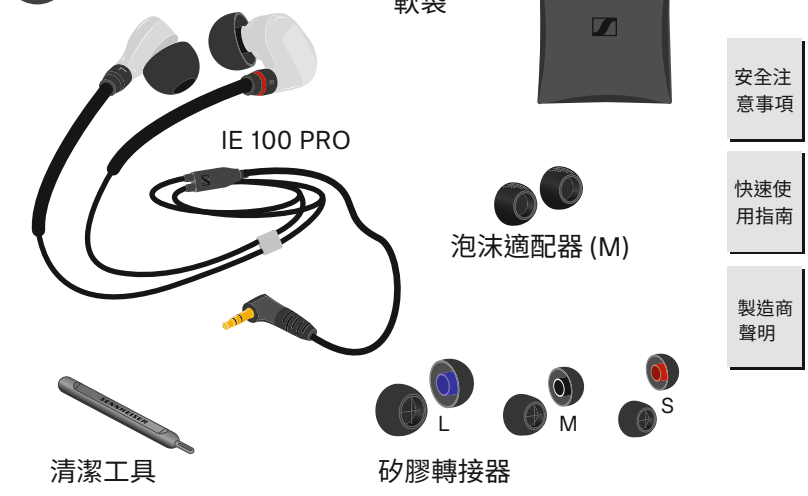

B IE PRO Bluetooth Connector
(Model: SEBT1)

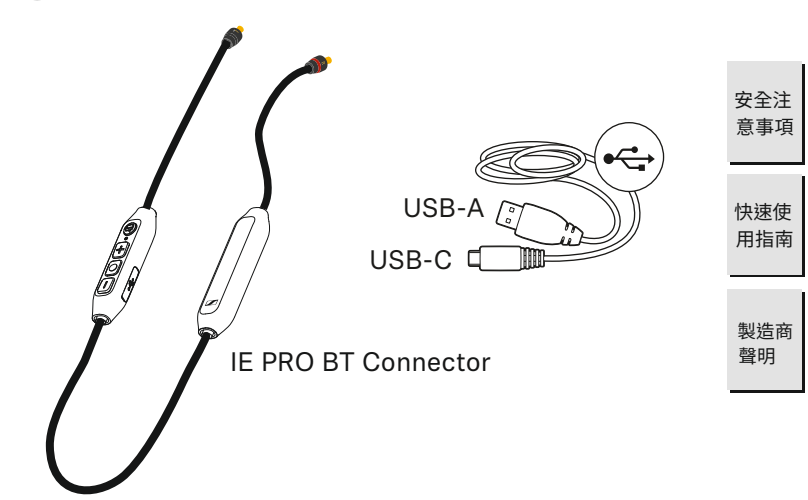

IE 100 PRO Wireless
Model: SEBT 1

Quick Guide
快速使用指南



www.sennheiser.com/download


Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com


Publ. 03/24, 587443/A04

SENNHEISER


使用 BT 連接器充電

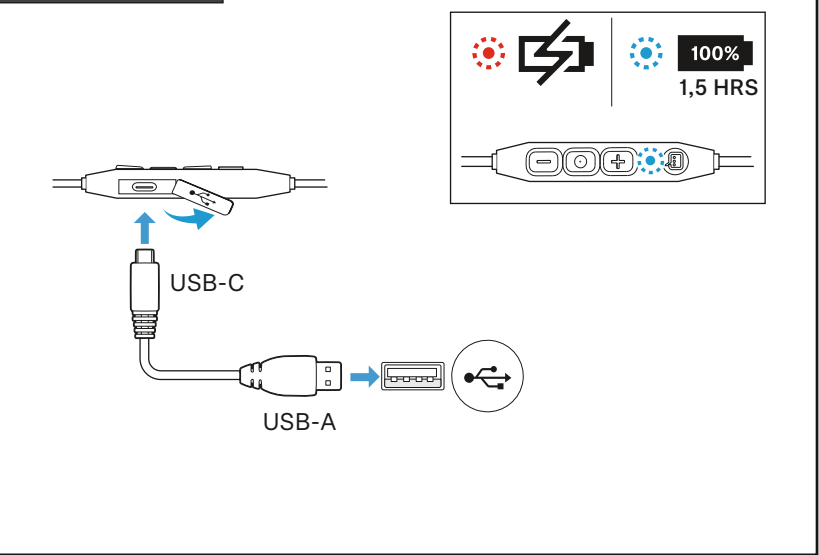


開啟/關閉耳機

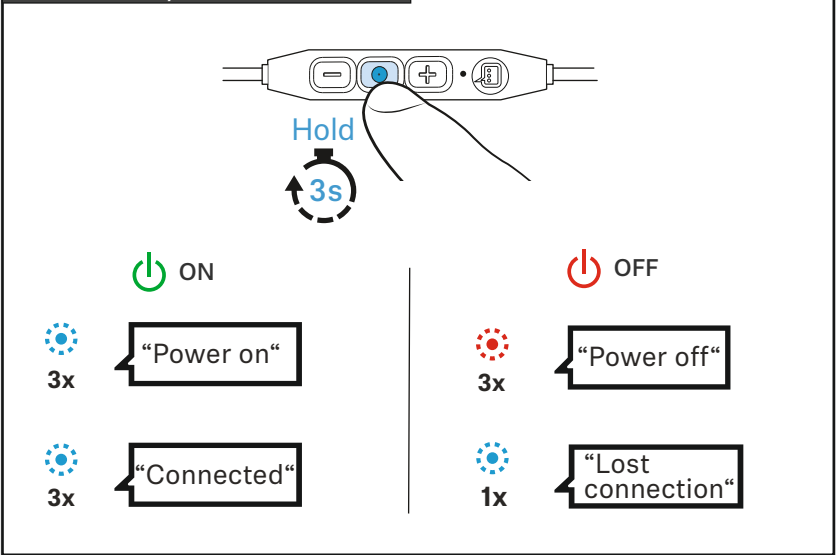


更換耳道適配器

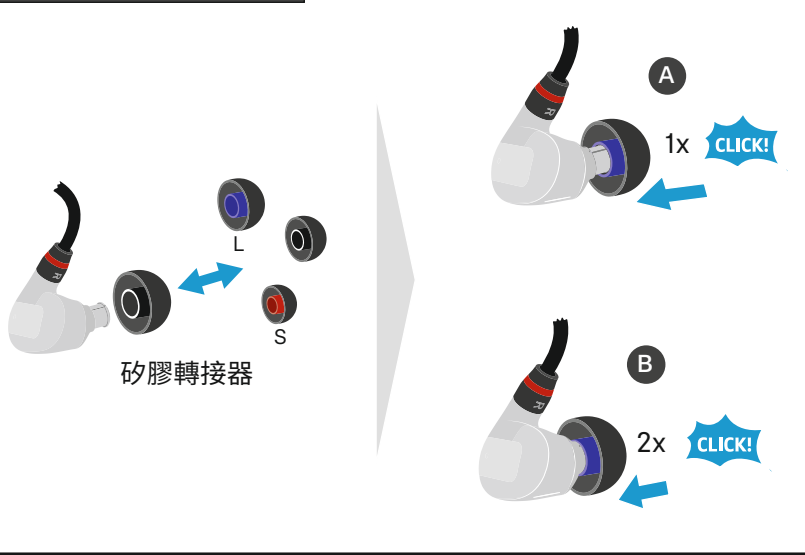


配戴耳機

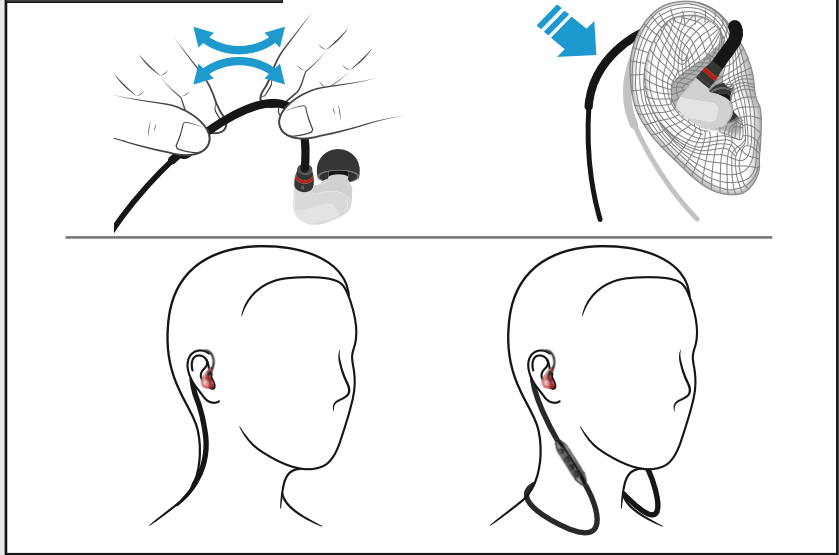




更換電纜

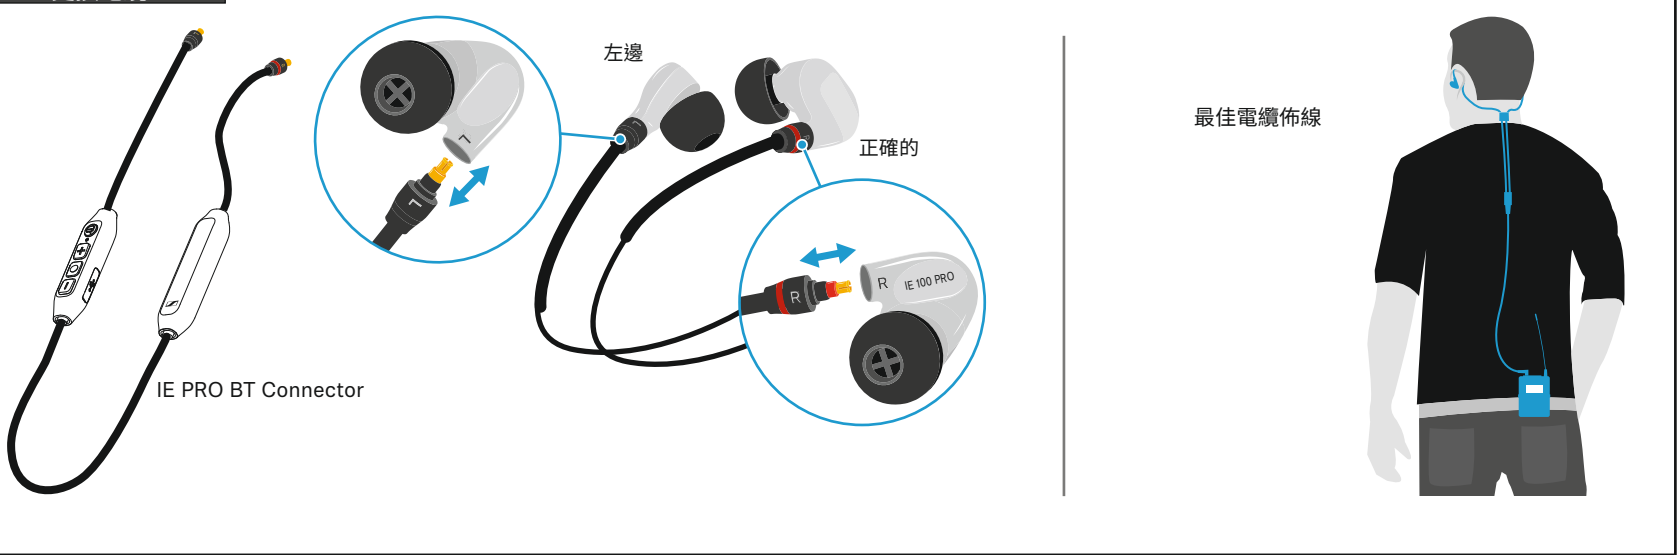


藍牙配對

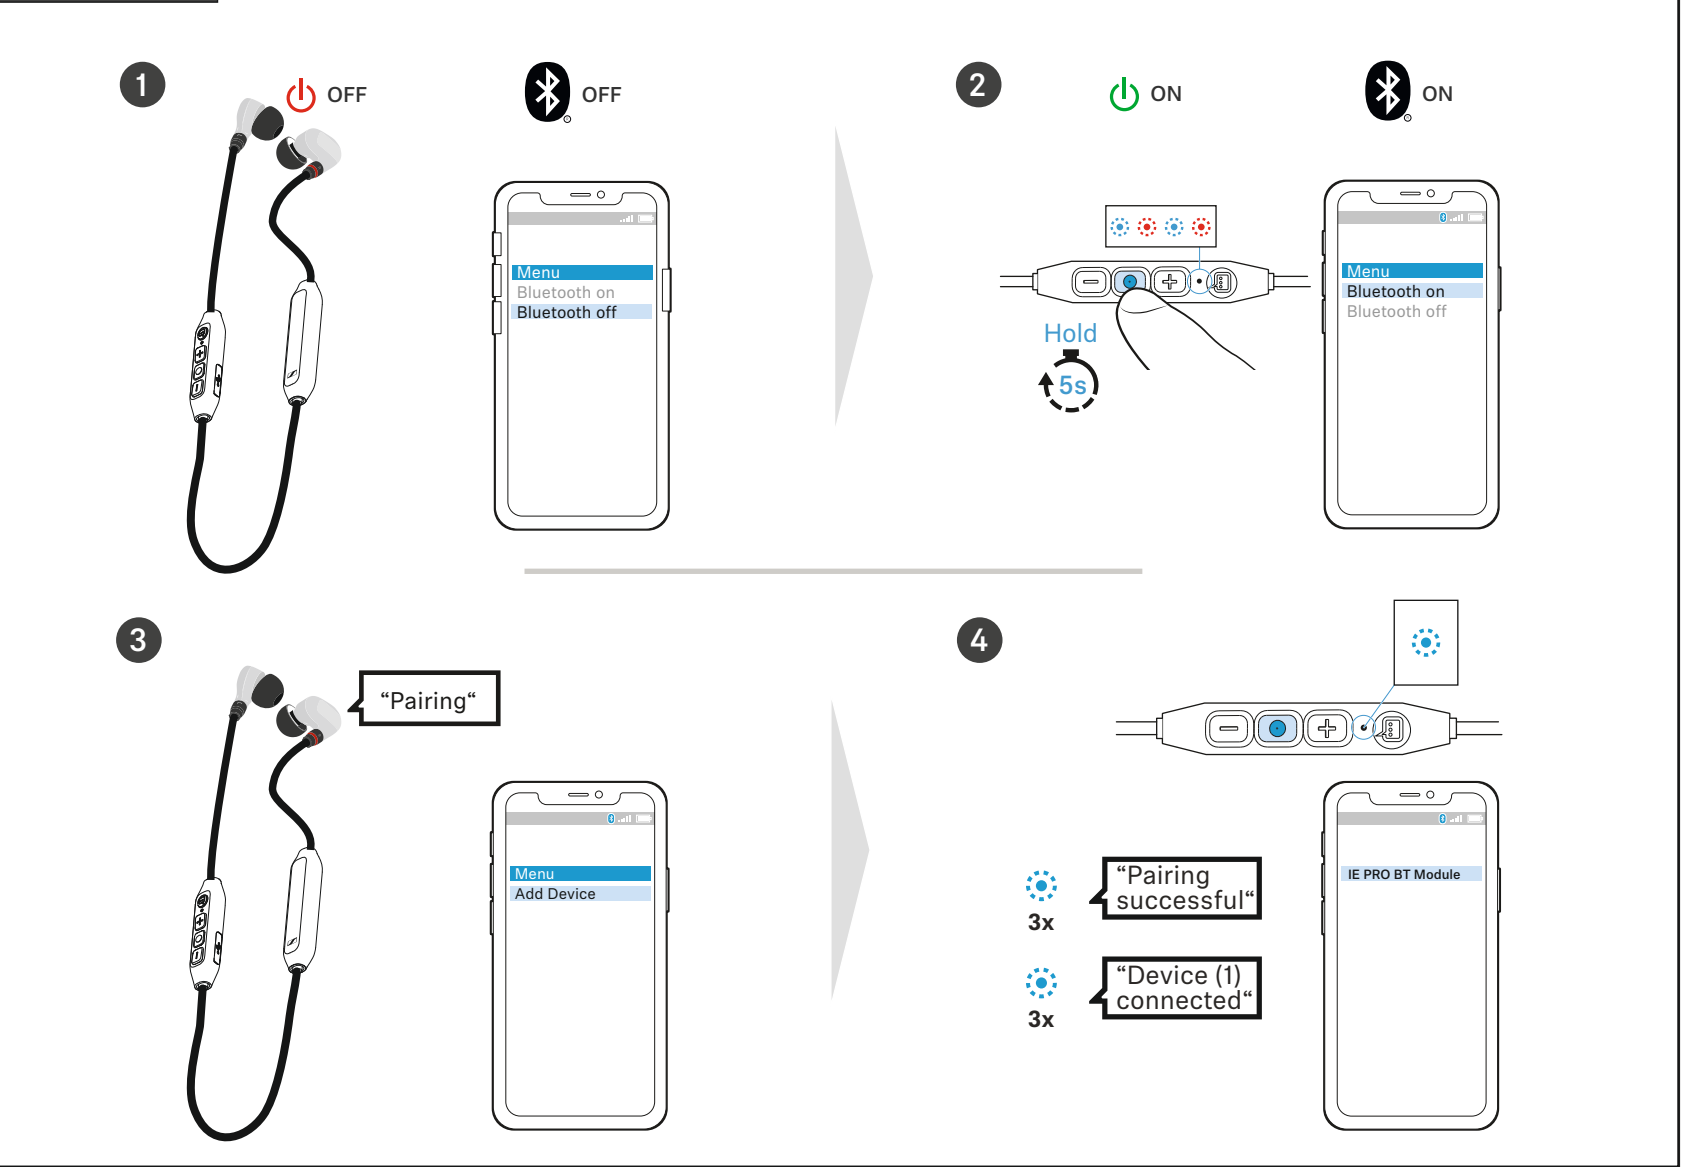


音樂功能

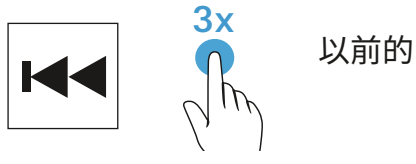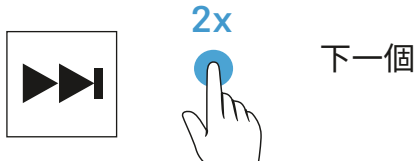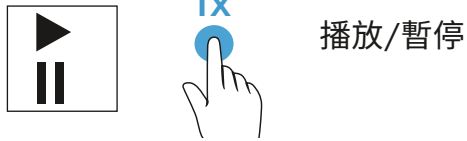


調節音量

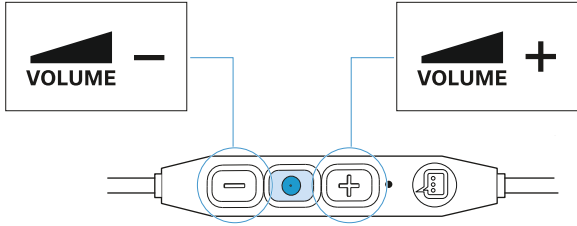

語音助理

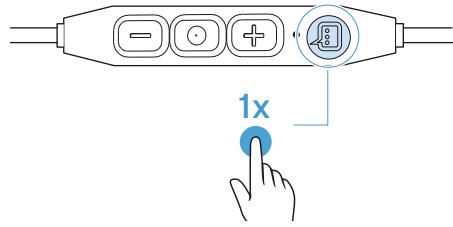

打掃

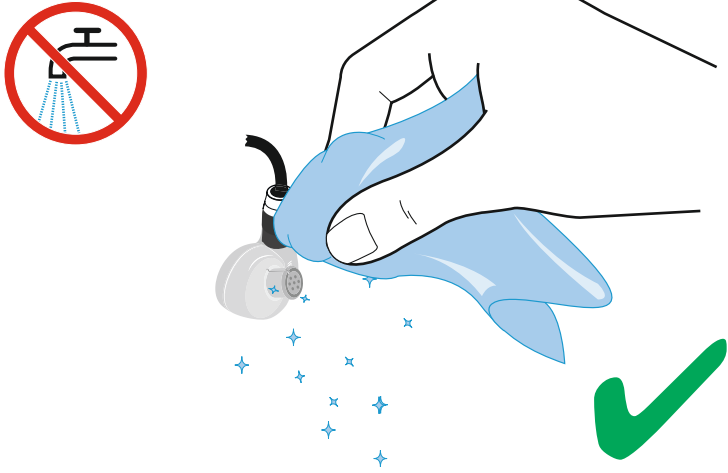

1

2







Apple®, iPad® and iPhone® are trademarks of Apple Inc., registered in the U.S. and other countries. Google Play and the Google Play logo are trademarks of Google LLC.

Information and Accessories

www.sennheiser.com

通話功能

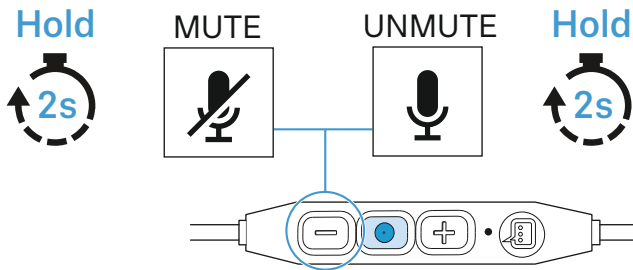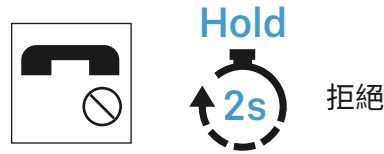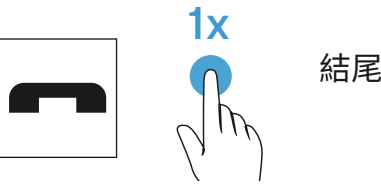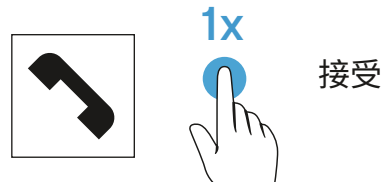

規格

Model: IE 100 PRO

Frequency response	20 Hz - 18,000 Hz
Impedance	20 Ω
Sound pressure level (SPL)	115 dB (1 kHz / 1 V _{rms})
Total harmonic distortion (THD)	< 0.1 % (1 kHz, 94 B)
Noise attenuation	< 26 dB
Magnetized field strength	1.63 mT
Temperature range	
Operation	-5 °C ... +50 °C
Storage	-20 °C ... +70 °C
Relative air humidity	< 95 %

Model: SEBT1

Bluetooth®	
Version	Bluetooth 5.0 compatible, class 1, BLE
Transmission frequency	2,402 Mhz to 2,480 MHz
Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK
Profiles	HSP, HFP, AVRCP, A2DP
Output power	10 mW (max)
Codec	SBC, aptX®, aptX® LL, AAC

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sennheiser electronic GmbH & Co. KG is under license.

Model: SEBT1

Wearing style	Bluetooth® neckband cable
Microphone principle	MEMS
Microphone frequency response	100 Hz - 8,000 Hz
Microphone sensitivity	(as per ITU-T P.79) -42 dBV/Pa
Microphone pick-up pattern (speech audio)	omni-directional
Power supply built-in rechargeable lithium-polymer battery	3.7 V $\approx$, 100 mAh
USB charging	5 V $\approx$, 100 mA max.
Operating time	10 hrs (music playback via SBC) with rechargeable battery; 240 hrs in standby mode
Charging time of rechargeable batteries	approx. 2.5 hrs
Temperature range	
Operation	+5 °C ... +40 °C $\pm$ 5 °C
Charging	+10 °C ... +40 °C $\pm$ 5 °C
Storage	-20 °C ... +70 °C
Temperature range	
Operation	10 ... 80 %, non-condensing
Storage	10 ... 90 %
Magnetic field strength	1.63 mT (with IE 100 PRO) 0.23 mT (without headphone)
Weight	approx. 13 g